


CARACTERISTICAS

MATERIAL hormigón armado
 COLOR gris / terracota / verde / beige
 ACABADO decapado e hidrofugado
 COLOCACIÓN apoyado sin anclaje (macizo)
 anclado con tornillos (flotante)
 PESO 1750 kg / 950 kg
 PALET 80x300/120x310 (macizo)
 sin palet (flotante)

MATERIAL reinforced cast stone
 COLOUR grey / terracota / green / beige
 FINISH acid-etched and waterproofed
 FIXING free-standing (solid)
 anchored with screws (floating)
 WEIGHT 1750 kg / 950 kg
 PALLET 80x300/120x310
 without pallet (floating)


DISEÑO / DESIGN Jose Antonio Martínez Lapeña / Elias Torres

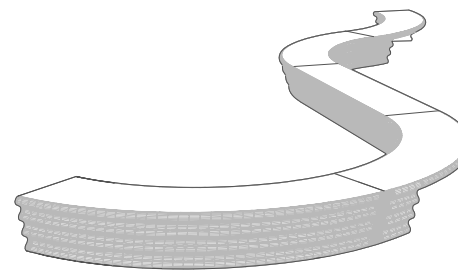

HEBI®

ESCALA 0 CM 50 CM


SISTEMA DE COLOCACION

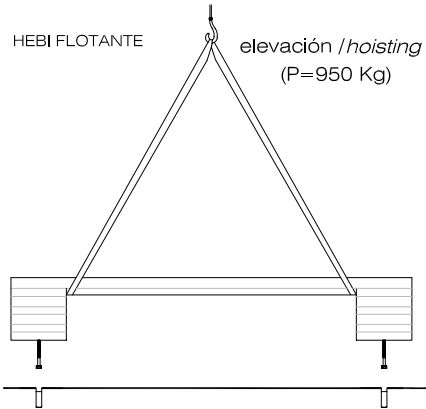

roscar los 2 tornillos a fondo M-16x140
 tightly screw the 2 stud bolts M-16x140







taladrar el pavimento y llenar con resina o mortero rico.
 drill pavement and fill with resin or fat mortar

centrar, colocar el banco y rejuntar la zona de apoyo
 centre and caulk the bench foot all around

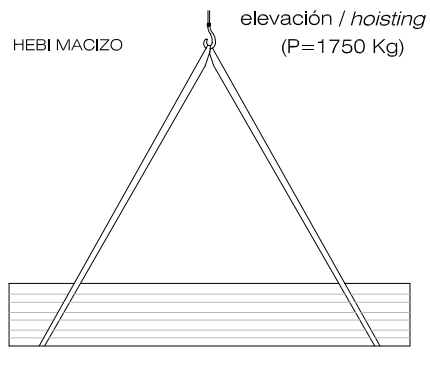


ELEMENTO APOYADO SIN ANCLAJE
 FREE-STANDING ELEMENT

GEOMETRIA

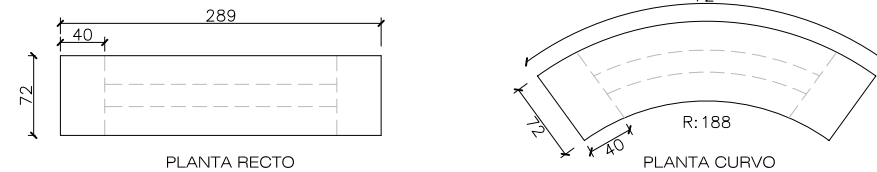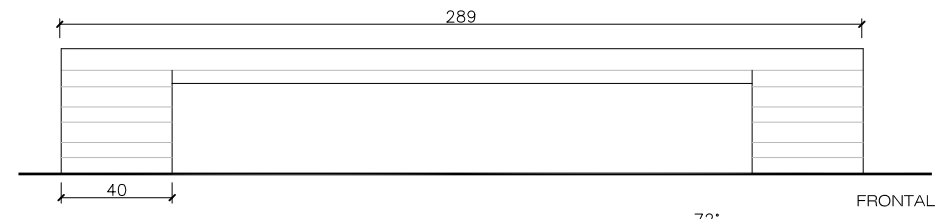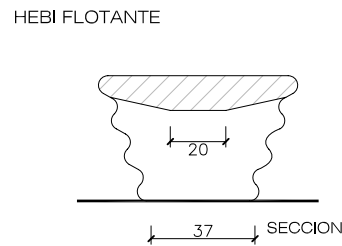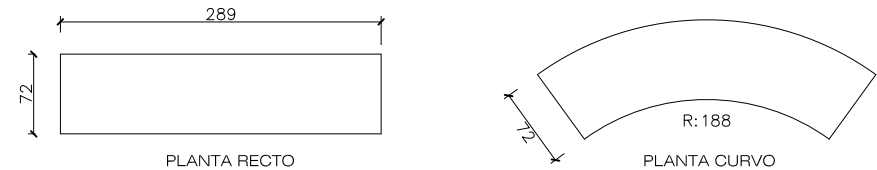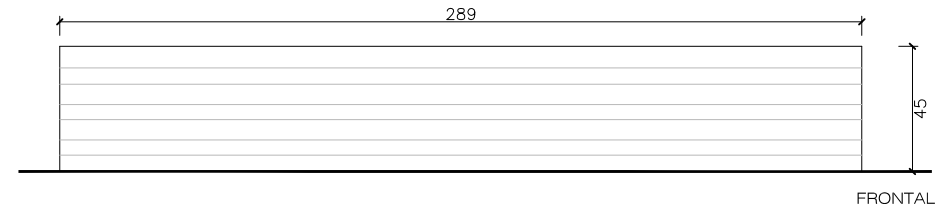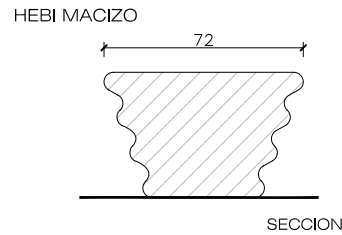

EJEMPLO DE AGREGACION

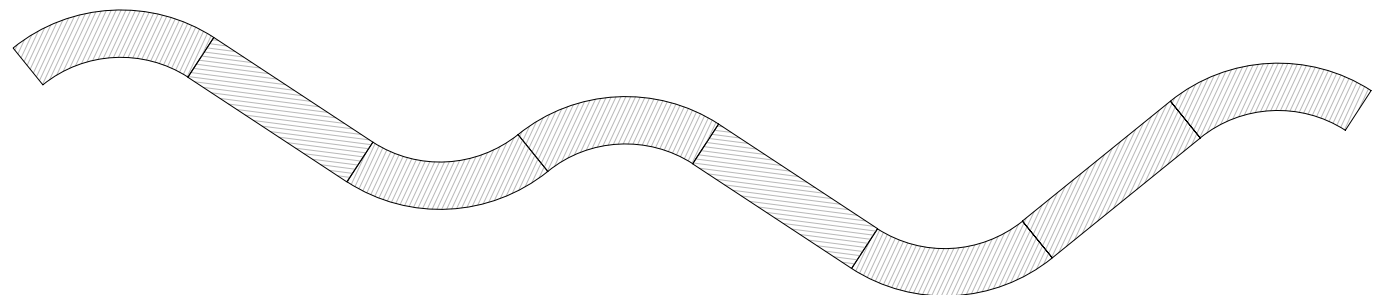

www.escofet.com

escofet

j.03