

The *Carmel* fountain has an attractive, discreet, cylindrical shape that allows it to blend in with its surroundings. It has a concrete base that houses pressure regulation and shut-off valve mechanisms and a hidden drain trap that makes it unnecessary to build auxiliary installation pits. The channel from the exterior is open-ended, to reduce clogging.

Sainless steel | Concrete | Aluminium  |  100 cm |  400 kg

 Update 01.10.2018



Origin

This fountain was designed in 2000 as a complementary urban element for the Carmel tree surround collection designed six years earlier, and now widely used in Barcelona.

Design

The spout is protected by two flaps that protect it from direct contact with the user's mouth. The drive mechanism is a chrome-plated timed push button and easy to apply.

Material

It has a dry-mix concrete base, a cast aluminium ring that is fitted to the base, a nuanced column in stainless steel sheeting and a cast aluminium upper tray. The water drainage channel is in polished stainless steel and is open-ended. The tap mechanism is a commercially available timer button that is easy to install.

Installation

The concrete base is recessed in the paving. It supports the cylindrical body of the fountain and contains a box with a cut-off valve for connecting to the water mains, facilitating the assembly of the unit. The base also has a drain trap system.





1. Drinking fountains

Carmel

Dimensions 100 x 100 x 80 (107) cm

Weight 400 kg

1.1 General features

Base Reinforced concrete **Fixing** Embedded

Finish Etched and waterproofed **Bucket** Cast aluminium

Column AISI 316L Sainless steel **Button** Timed, chrome-plated

Colours



GR. Grey



A. AISI 316L
Sainless steel





B. Cast aluminium





1.2 Installation system

Hoisting
(W= 400 kg)

Installation
Prepare the ground according to the graph, place the fountain. Concrete after placing.

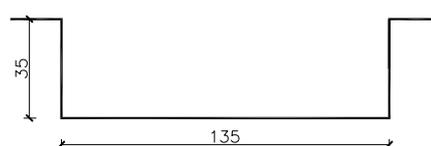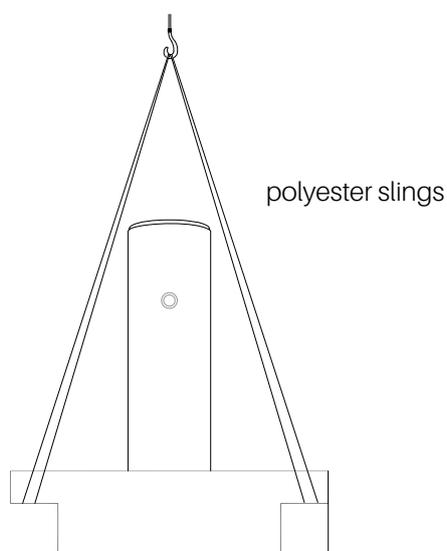

Carmel

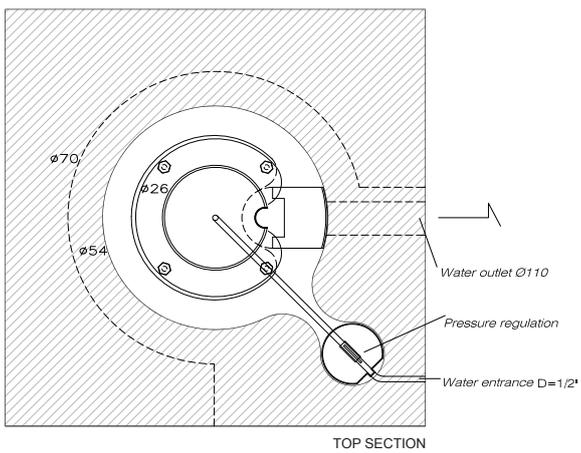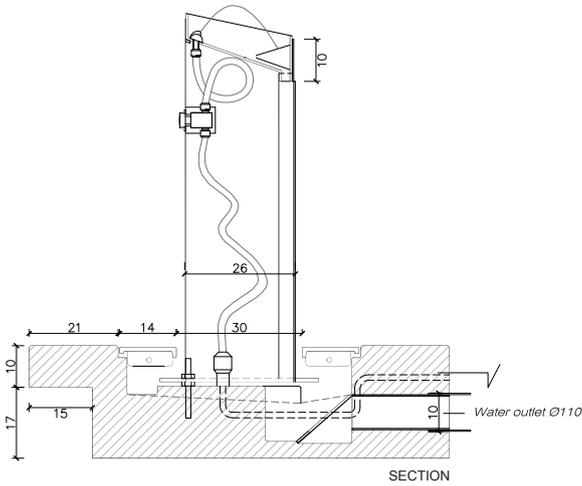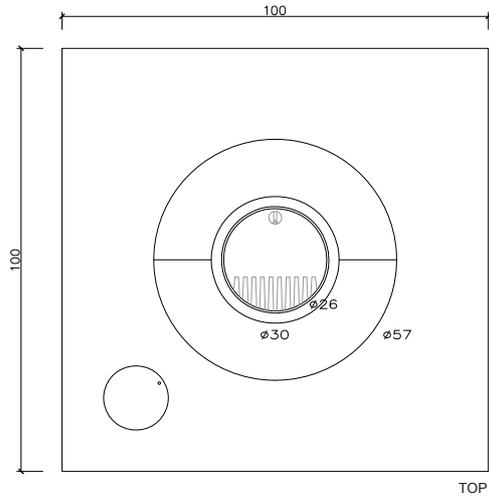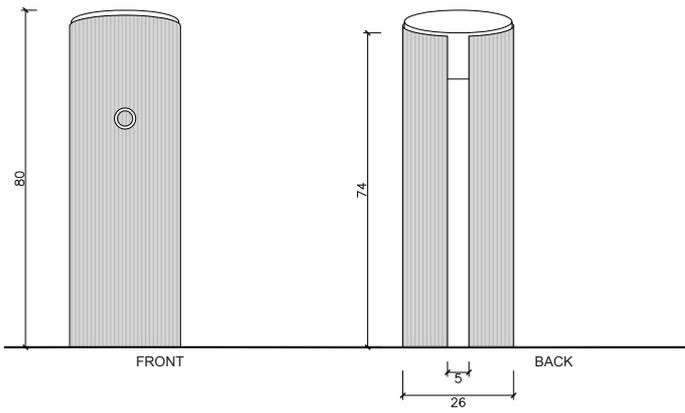



Warranty

5 years in concrete elements.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Follow us



GA-2005/0072 SST-0090/2010 ER-0403/2016