

Tao is a bench and chair series with a classical design. The structural combination of the cast aluminium support and the wooden planks inserted into the profile generates a much more resistant structure compared to other models.

FSC® Certified Wood | GFRP | Aluminium  |  175 cm/max |  55 kg |  3

 Update 03.12.2019



Origin

From the division of this primordial unity, *Tao*, the initial duality of yin and yang is born, the female and male principle present at the root of all material expression, in this case evident in the two materials integrated into this collection.

Robust

The insertion of the planks into the aluminium supports generates a robust, sturdy structure that ensures the dimensional stability of the wood in the event of potential deformations.

Ergonomic

The combination of the height and inclination of the seat, along with the height of the back and arm rests come together to make the *Tao* bench and chair extremely comfortable.

Material

The combination of a single support model and a single FSC tropical wood plank cross section allow for the assembly of the chair of 60 cm and the benches that are 180 cm in length with two supports, or a double bench with a length of 300 cm and three supports. Optionally, it incorporates GFRP planks in yellow or other colours, depending on the quantity.

Installation

Self-stabilising and installed directly on the paving or anchored to it with 4 DIN 913 M10x100 mm screws fastened with resin.





The Chinese word 'tao' usually means 'path', a circular path that starts out and ends at the same point. A path along which all living beings walk until they are reabsorbed by the tao where they originated.



1. Bench

Tao	Chair	Bench 175	Bench 300
Dimensions	57 x 66 x 44 cm	177 x 66 x 44 cm	302 x 66 x 44 cm
Weight	40 kg	55 kg	91 kg

1.1 General features

Seat	Tropical wood FSC® PRFV slats	Fixing	Anchored with screws
Finish	Treated with oil GFRP Colour RAL 1000 / Other colours RAL +20 uds		
Supports	Cast aluminium		
Finish	Textured Silver coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.		


Colours



A. Tropical wood FSC®



B. GFRP colour
RAL 1000



C. Textured Silver
aluminium


1.2 Installation system

Hoisting

(P= 40 / 55 / 91 kg)


Installation

Drill pavement (Ø12mm) and fill with resin. Tightly screw the 4 stud bolts DIN 913 M10x100 mm. Center and caulk the bench foot all around.

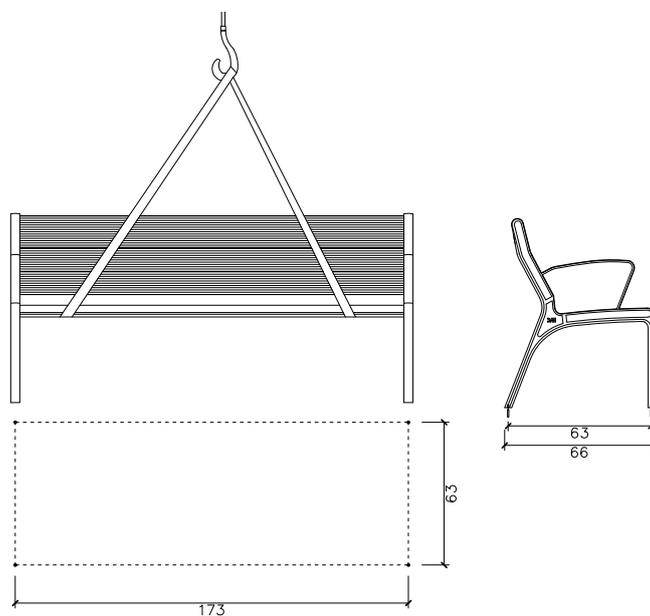


1.3 Geometry


Chair Tao

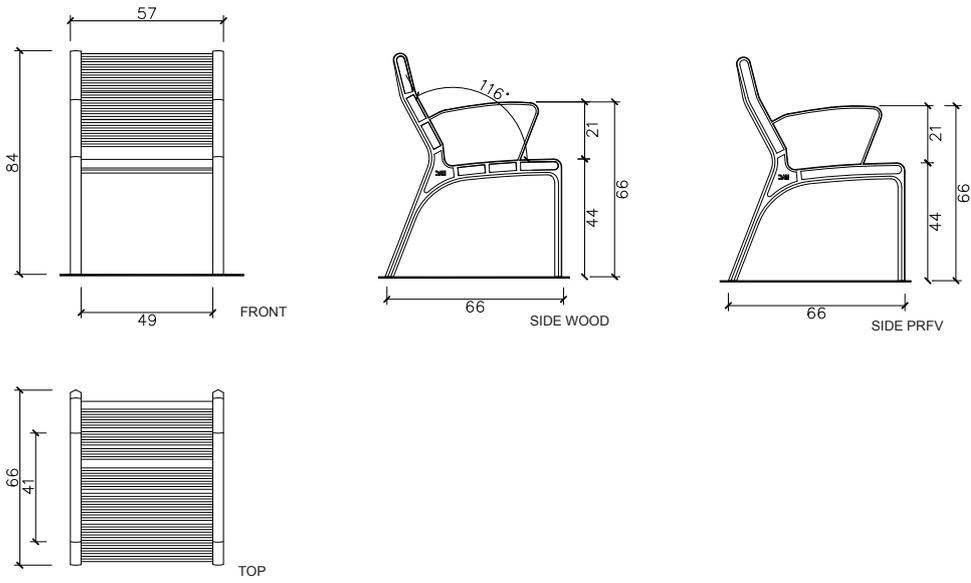

Bench Tao 175

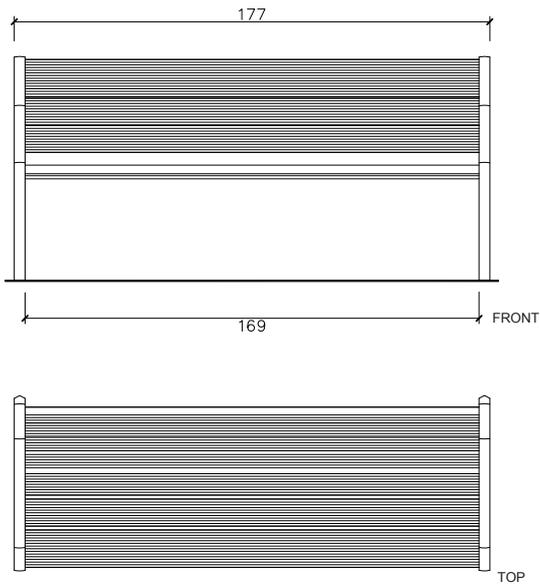

Bench Tao 300

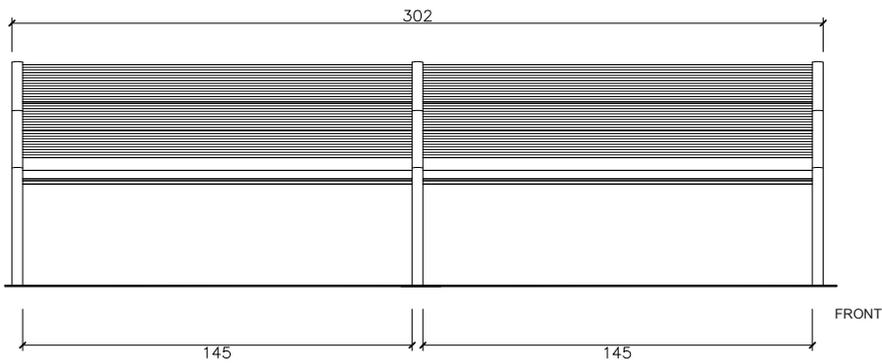



The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com



GA-2005/0072 SST-0090/2010 ER-0403/2016