


# CARACTERÍSTICAS / CHARACTERISTICS

**MATERIAL** madera tropical certificada FSC®  
 madera pino certificada FSC®  
**SOPORTE** acero zincado  
 pintado color negro forja  
**COLOC.** anclado con tornillos  
**PESO** banco 220: 77 kg (apoyarazos: 83 kg)  
 banco 150: 66 kg (apoyarazos: 72 kg)  
 silla: 48 kg (apoyabrazos: 54 kg)

**MATERIAL** tropical wood FSC® certified  
 pine wood FSC® certified  
**SUPPORT** zinc plated steel  
 forge black coated finish  
**FIXING** anchored with screws  
**WEIGHT** bench 220: 77 kg (armrest: 83 kg)  
 bench 150: 66 kg (armrest: 72 kg)  
 chair: 48 kg (armrest: 54 kg)

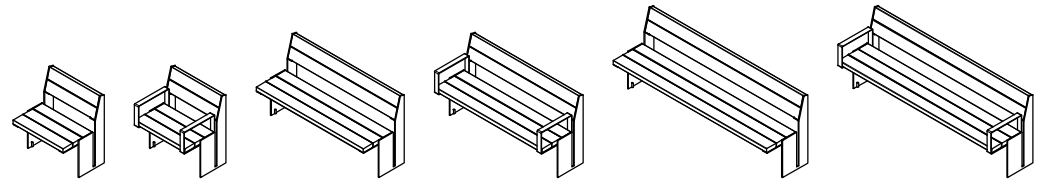


Update 04/03/2020  
 Cotas / Sizes cm

## INSTALACIÓN / INSTALLATION


elevación / hoisting  
 P = 77 kg / 83 kg / 48 kg / 54 kg

eslingas de poliéster /  
 polyester slings

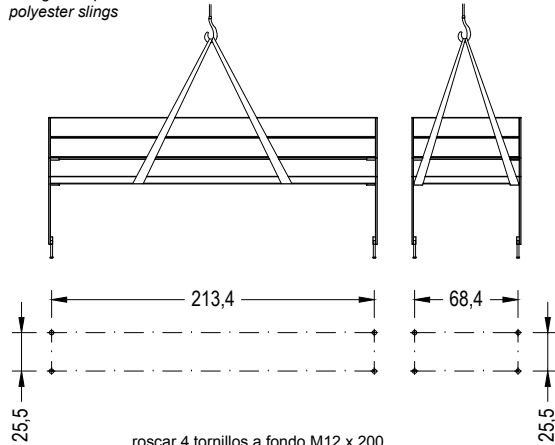


rosacar 4 tornillos a fondo M12 x 200  
 tightly screw 4 stud bolts M12 x 200

taladrar el pavimento Ø30 mm y llenar con resina  
 drill pavement Ø30 mm and fill with resin

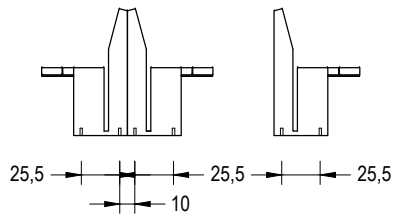



## AGREGACIÓN / AGGREGATION

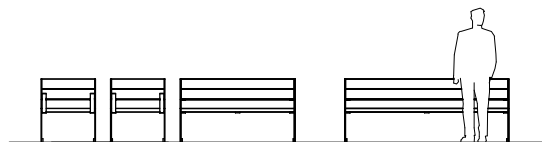




## GEOMETRÍA / GEOMETRY

E:1/40

### MOOK 220 banco / bench

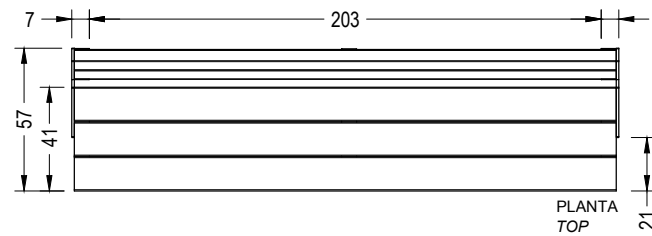
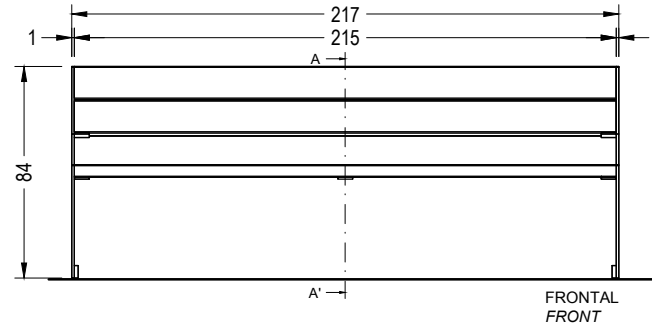


### MOOK silla / chair

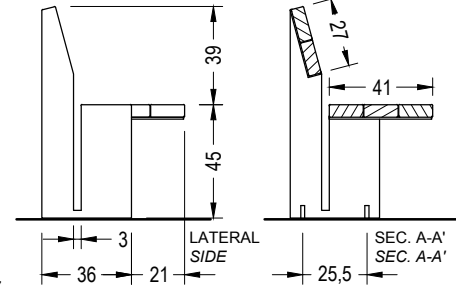




E:1/30

### MOOK 220 banco apoyabrazos / armrest bench

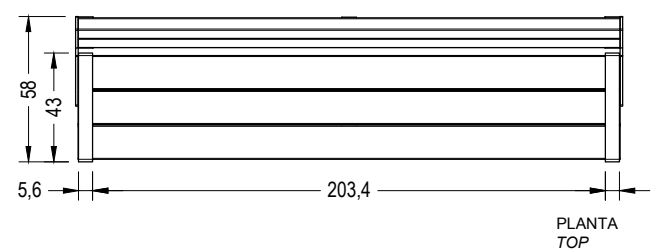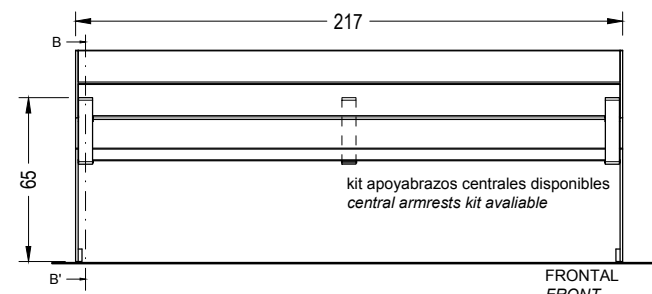


### MOOK silla apoyabrazos / armrest chair

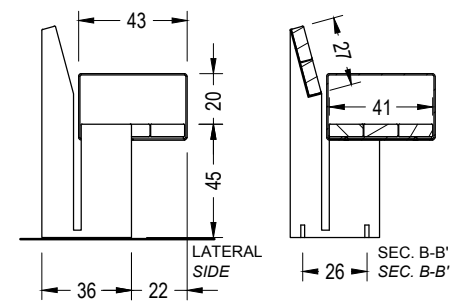

# CARACTERÍSTICAS / CHARACTERISTICS

**MATERIAL** madera tropical certificada FSC®  
 madera pino certificada FSC®  
**SOPORTE** acero zincado  
 pintado color negro forja  
**COLOC.** anclado con tornillos  
**PESO** banco 220: 77 kg (apoyarazos: 83 kg)  
 banco 150: 66 kg (apoyarazos: 72 kg)  
 silla: 48 kg (apoyabrazos: 54 kg)

**MATERIAL** tropical wood FSC® certified  
 pine wood FSC® certified  
**SUPPORT** zinc plated steel  
 forge black coated finish  
**FIXING** anchored with screws  
**WEIGHT** bench 220: 77 kg (armrest: 83 kg)  
 bench 150: 66 kg (armrest: 72 kg)  
 chair: 48 kg (armrest: 54 kg)

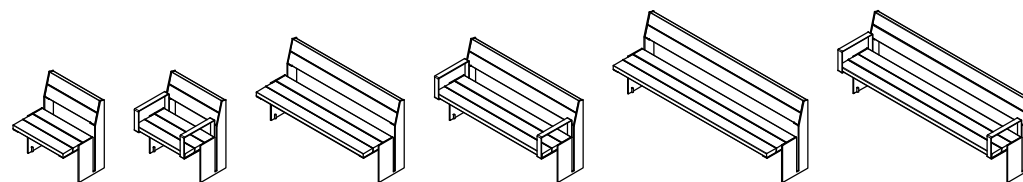


Update 04/03/2020  
 Cotas / Sizes cm

## INSTALACIÓN / INSTALLATION


elevación / hoisting  
 P = 66 kg / 72 kg

eslingas de poliéster /  
 polyester slings

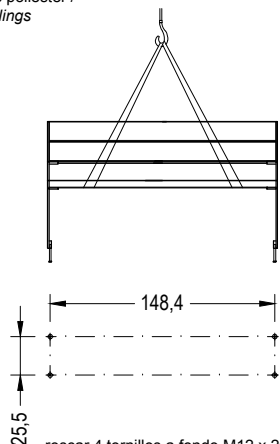


roscar 4 tornillos a fondo M12 x 200  
 tightly screw 4 stud bolts M12 x 200

taladrar el pavimento Ø30 mm y llenar con resina  
 drill pavement Ø30 mm and fill with resin

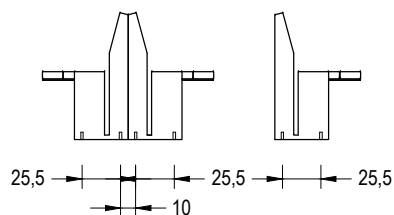


## AGREGACIÓN / AGGREGATION

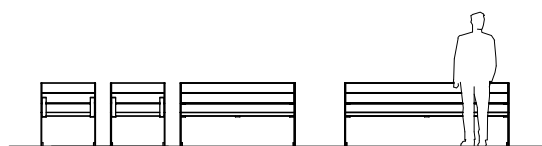


## GEOMETRÍA / GEOMETRY

E:1/40


### MOOK 150 banco / bench

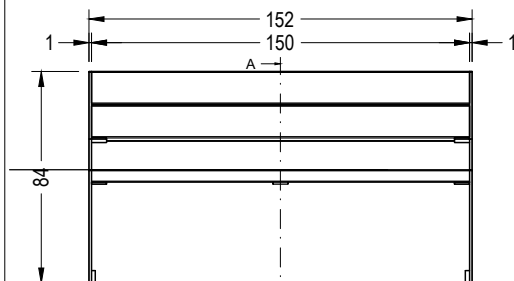

FRONTAL  
 FRONT

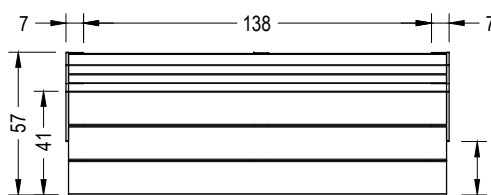


PLANTA  
 TOP

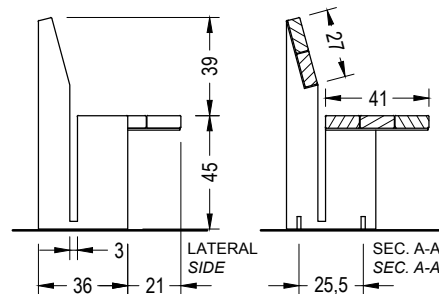


LATERAL  
 SIDE

SEC. A-A'  
 SEC. A-A'


### MOOK 150 banco apoyabrazos / armrest bench

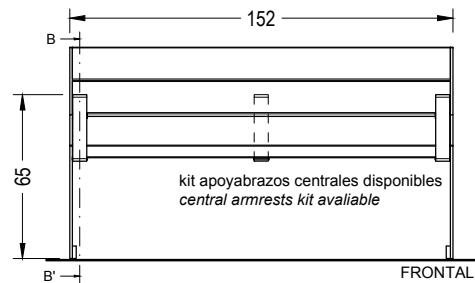

FRONTAL  
 FRONT

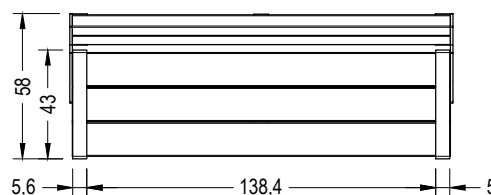

PLANTA  
 TOP

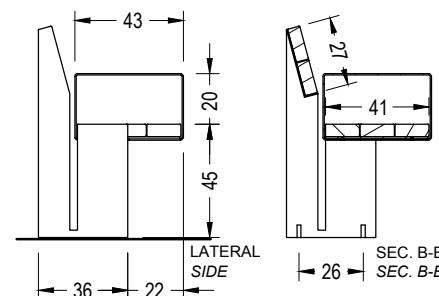

LATERAL  
 SIDE

SEC. B-B'  
 SEC. B-B'

kit apoyabrazos centrales disponibles  
 central armrests kit available

E:1/50

E:1/30