


CARACTERISTICAS

MATERIAL	Poliétileno LDPE texturizado	MATERIAL	Textured polyethylene LDPE
COLOR	negro / gris / caqui / pistachio	COLOR	black / grey / hunter green / pistachio
BASE	horniçón armado	BASE	reinforced cast stone
	decapado e hidroçugado		acid-etched and waterproofed
GRIFO	pulsador temporizado cromado	JET	chrome push-operated with timer mechanism
TAPA	incorpora llave de paso y sifón	TAP	embeds stop-cock and water trap
COLOCACION	empotrado / no se recomienda su instalación sobre suelos arenosos	FIXING	embedded installation on sandy soils is not recommended
PESO	39 kg; Cuerpo 6 kg / Base 33 kg	WEIGHT	39 kg; Body 6 kg / Base 33 kg
		DISEÑO / DESIGN	Sarr&deIarocha




SISTEMA DE COLOCACION

GEOMETRIA

ESCALA 0 CM 25CM

Montaje / mounting

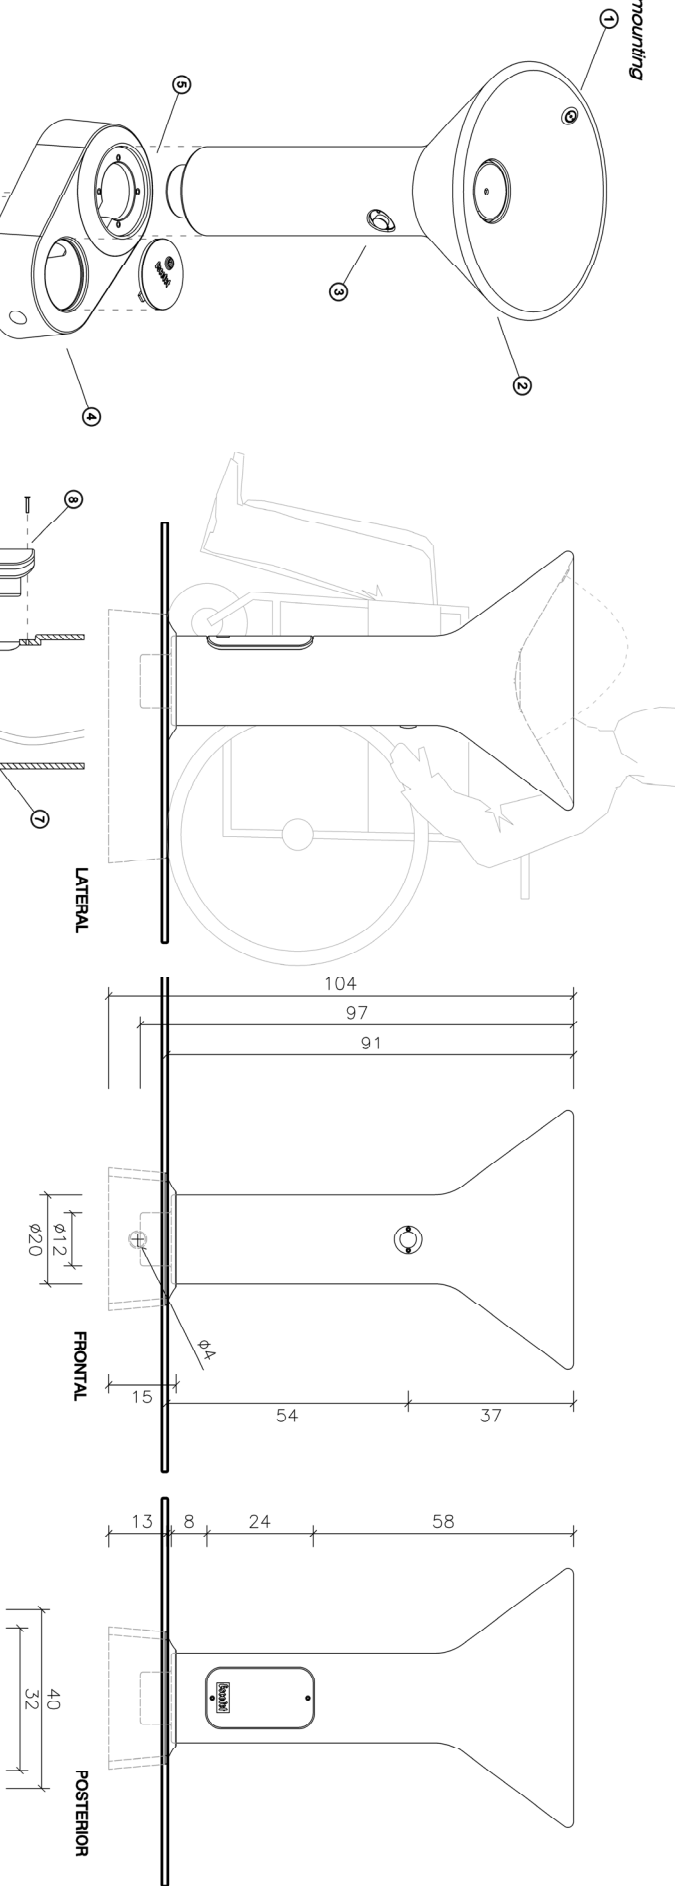

Hormigonar después de emplazar / Casting concrete after placement

- ① surtidor supplier
- ② fuente cuerpo P= 6 kg body fountain P= 6 kg
- ③ temporizador presio 55 timer presio 55
- ④ base P= 33 kg base P= 33 kg
- ⑤ 4 Casquillos M-10 4 M-10 Socket
- ⑥ llave de paso stop-cock
- ⑦ flexo
- ⑧ puerta registro / 2 tornillos M-6 door registration / 2 screw M-6
- ⑨ racor acometida D=1/2" water entrance
- ⑩ sifón water trap
- ⑪ desagüe tubo PVC Ø125 water outlet PVC pipe Ø125
- ⑫ acometida D= 1/2" water entrance
- ⑬ mortero fco o resina fat mortar or resin
- ⑭ 2 Casquillos M-12 2 M-12 Socket

