

*Pedreta* is designed as a parallelepiped that leans forward to provide its service. This element stands out for its formal austerity and the simplicity with which it is installed on the ground, participating in the dialogue established with the benches or other elements in the same tone and material.

Concrete | 82 cm | 390 kg | 66 L

Update 02.10.2018





**Origin**

Originally designed for the rural gardens of the Schloss Dyck castle in the Rhineland, Germany, it was simultaneously installed in the public area surrounding the Agbar Tower in Barcelona.

**Design**


Its geometry includes an opening in the concrete front that is used for waste disposal purposes and an inspection hole that occupies the entire rear plane, for emptying the waste from a plastic bin with a capacity of 50 litres.

**Material**

*Pedreta* is a small litter bin made from dry mix concrete and with an etched stone finish, supplied in all the standard chart colours. The rear access door is hinged and has a triangular lock made of stainless steel. Inside it is a yellow high mass density polyethylene bin measuring 600 x 400 x 350 mm.

**Installation**

The volume is self-standing, and required no anchoring elements due to its natural stability.

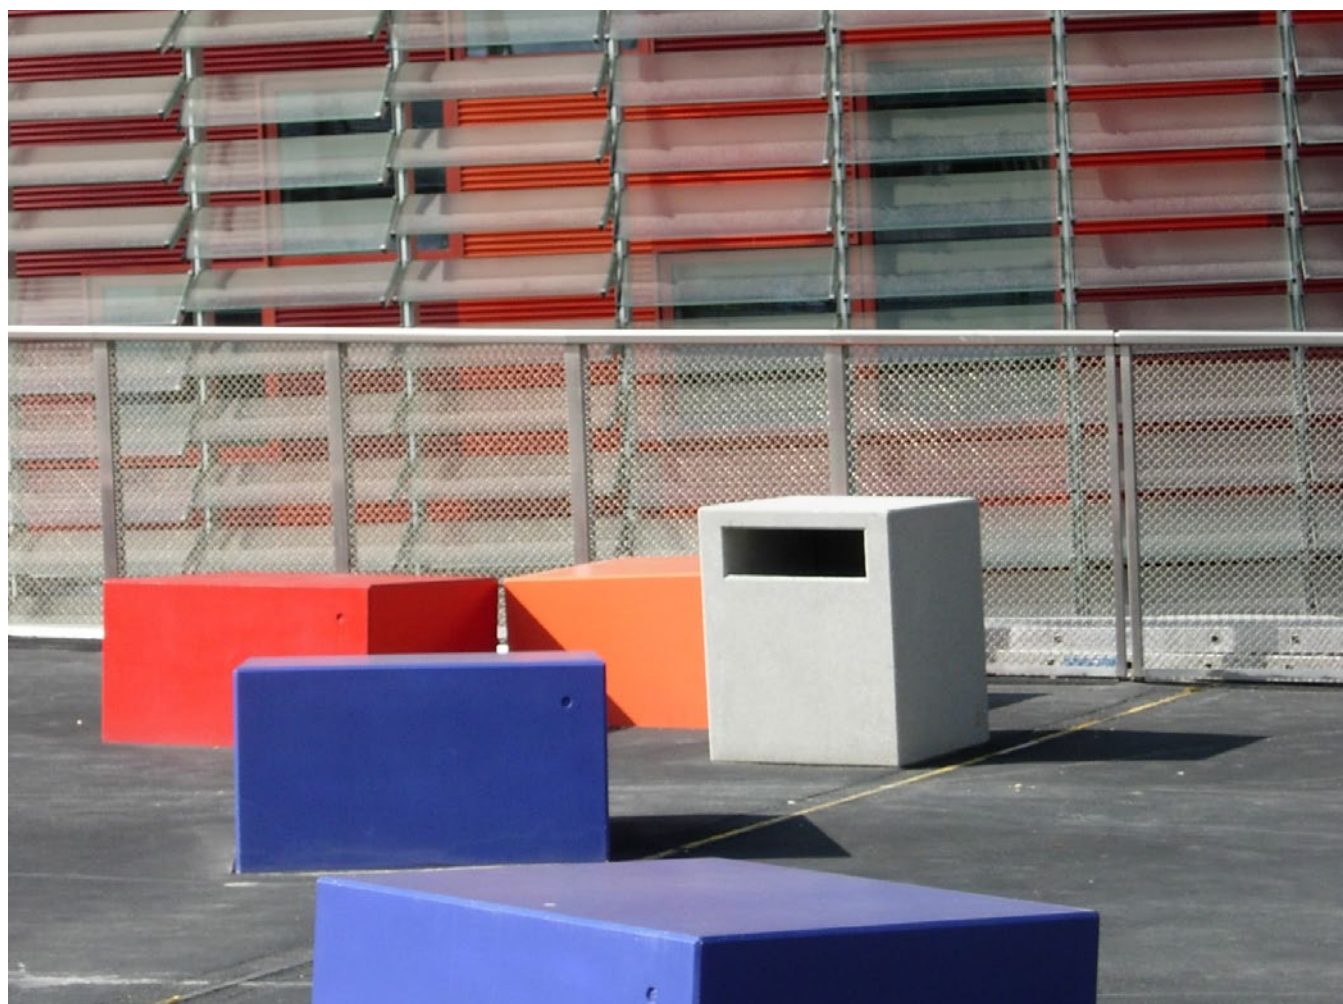

PEDRETA



Iscofet®




1. Litter bins

|            |                 |
|------------|-----------------|
| Pedreta    |                 |
| Dimensions | 75 x 75 x 60 cm |
| Weight     | 390 kg          |
| Capacity   | 66 L            |

1.1 General features


|          |                         |        |                                      |
|----------|-------------------------|--------|--------------------------------------|
| Material | Reinforced concrete     | Fixing | Anchored with screws / Free-standing |
| Finish   | Etched and waterproofed |        |                                      |
| Door     | Sainless steel          |        |                                      |

|         |   |   |   |
|---------|---|---|---|
| Colours |    |    |    |
|         | GR. Grey  | NG. Black   | BL. White   |
|         |  |  |  |
|         | CA. CA Grey   | RA. Red   | BG. Beige   |


1.2 Installation system

**Hoisting**  
(W=390 kg)

**Installation**  
*Anchored with screws* Tightly screw the 2 stud bolts M12 x 140 mm. Drill pavement (Ø 40 x 180 mm) and fill with resin. Center and caulk the bench foot all around.

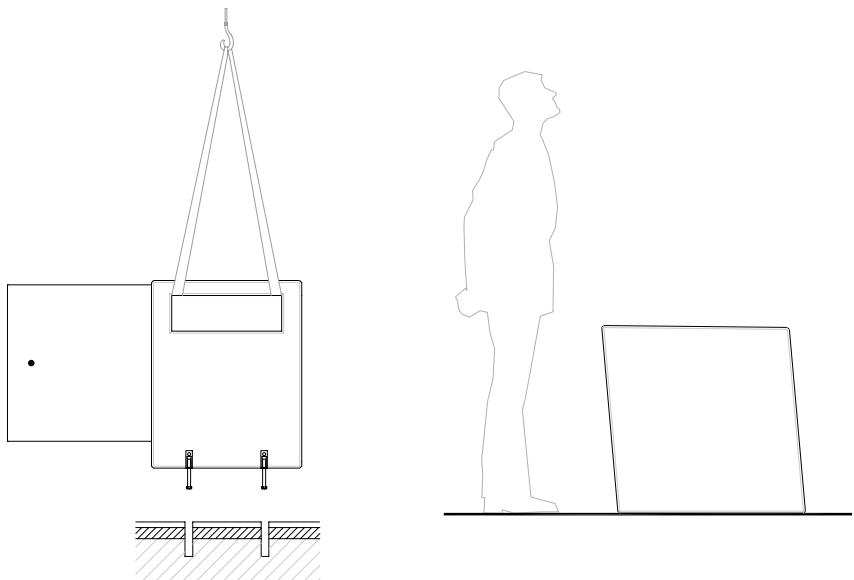

Pedreta

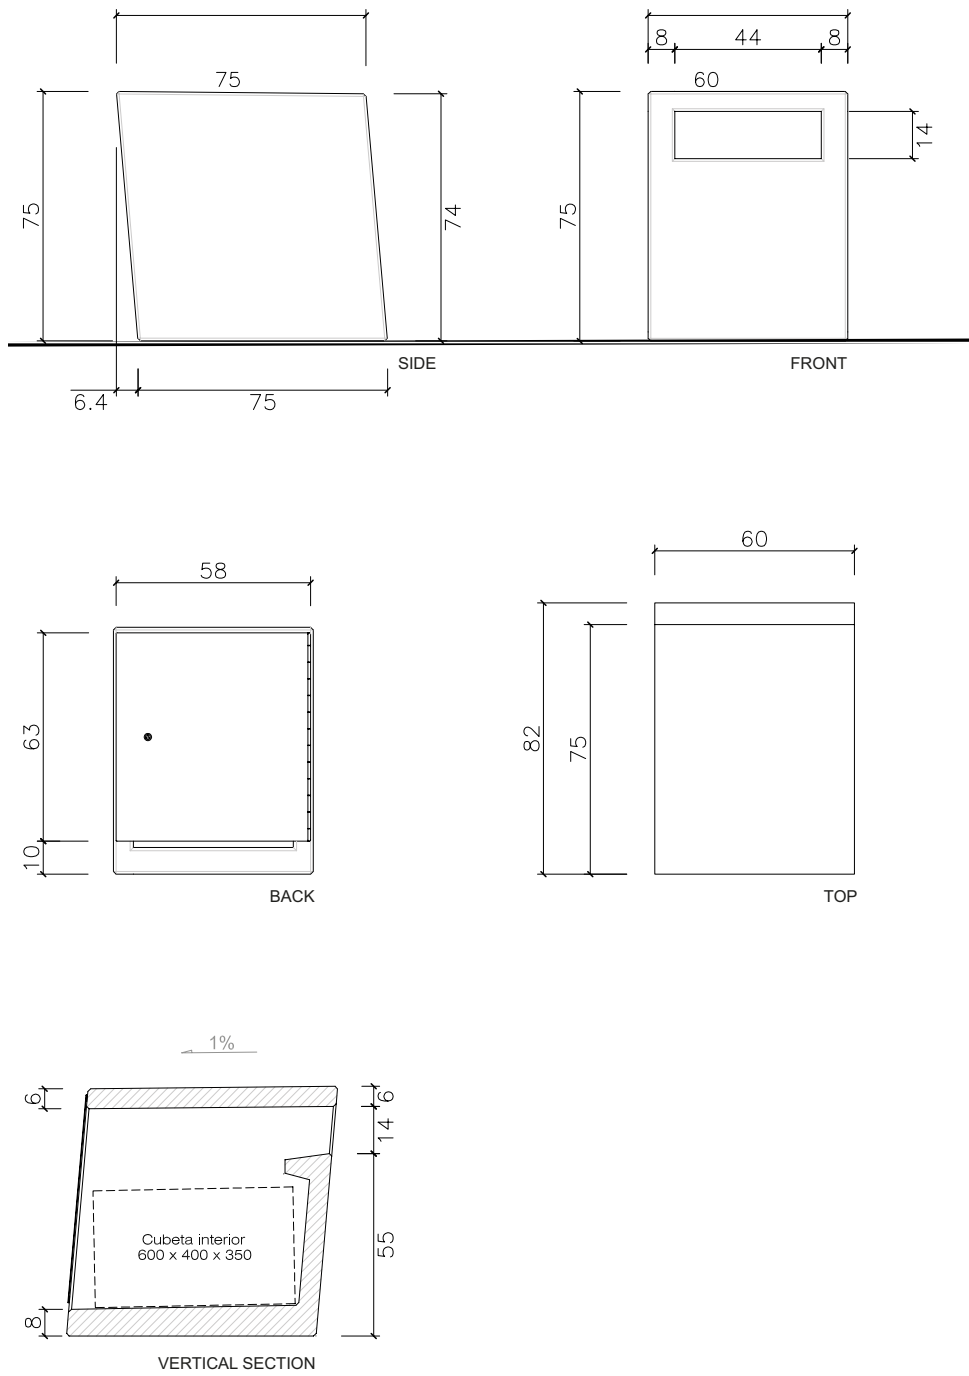



## Warranty

5 years in concrete elements.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A  
Head office and production

Montserrat, 162  
E 08760 Martorell  
Barcelona - España  
T. 0034 937 737 150  
F. 0034 937 737 151

info@escofet.com  
www.escofet.com

Follow us



GA-2005/0072 SST-0090/2010 ER-0403/2016