

Bollard is a collection of concrete spheres that organise and delimit public space. They come in four different diameters of 40, 55, 70 and 90 cm and in the form of a half sphere with a diameter of 90 cm. The collection includes the *Bollard Buzo 700* model, which has a built-in projector with two orientation options. One to light up the paving and another to light up a façade or the leaves of a tree.

Concrete | Ø 700 cm | ⚖ 440 kg

🔄 Update 24.08.2020



BOLLARD

Escofet_Lab 1994-2009

Escofet®

Origin

In *Bollard Buzo 700*, the combination of the rounded geometry of the solid concrete sphere and the tiny illuminated glass opening gives it an appearance similar to that of a diving helmet emerging from the urban landscape.

Material

Reinforced concrete with an etched finish and in the standard *Escofet* chart colours.

Installation

Bollards 400 and *550* are anchored to the paving with one M16 x 140 mm screw. *Bollards 700* and *900* are anchored with one M20 x 200 mm screw and fixed with resin in a hole with a diameter of 40 mm.

BOLLARD



Escofet®



1. Boundary

Bollard	400	550	700	900	900 Media esfera
Dimensions	Ø400	Ø550	Ø700	Ø900	Ø900
Weight	85 kg	115 kg	440 kg	910 kg	455 kg
Bollard Buzzo	Luz H	Luz V			
Dimensions	Ø700	Ø700			
Weight	440 kg	440 kg			
Lighting	DOPO LED 6,5W 349A-L0107B-30				

1.1 Características generales

Material	Concrete	Fixing	Anchored with screws
Finish	Etched and waterproofed		


Colours



GR. Grey



BL. White



CA. CA Grey



BG. Beige

1.2 Installation system

Hoisting

(W= 85 / 115 / 440 / 910 / 455 kg)

Installation

Bollard 400, 550 y Media esfera

Tightly screw the stud bolt M16x140 mm. Drill pavement (Ø40x180 mm) and fill with resin or fat mortar. Center and caulk the bench foot all around.

Bollard 700 y 900


Tightly screw the stud bolt M20 x 200 mm. Drill pavement (Ø40x200 mm) and fill with resin or fat mortar. Center and caulk the bench foot all around.

Bollard Buzo


Before finally place the item, bring the electrical connection to the connection terminal. Tightly screw the stud bolt M20 x 200 mm. Drill pavement (Ø40x200 mm) and fill with resin or fat mortar. Center and caulk the bench foot all around. Once located, connect and mount the luminaire into its receptacle.

1.2 Installation system

Bollard 400, 550, 700, 900, y 900 Media esfera

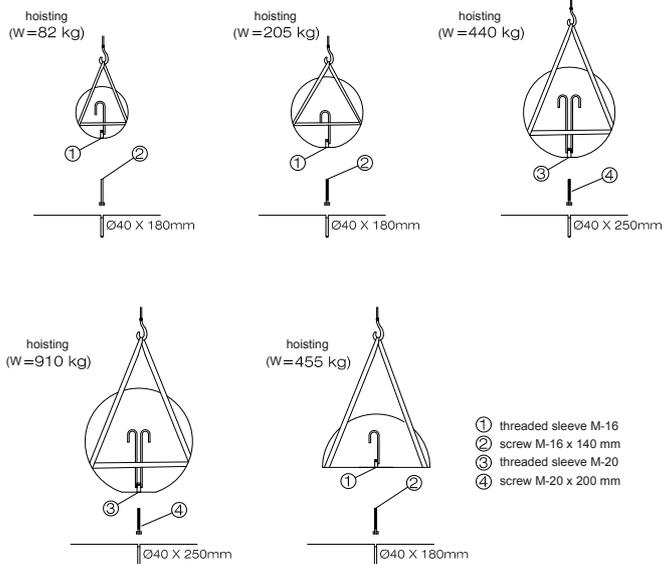


Bollard Buzo 700

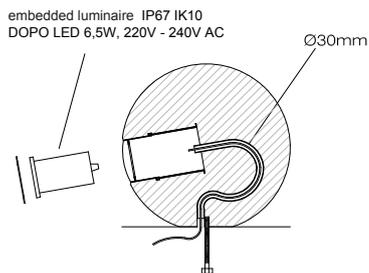


1.3 Geometry

Bollard 400, 550, 700, 900, y 900 Media esfera

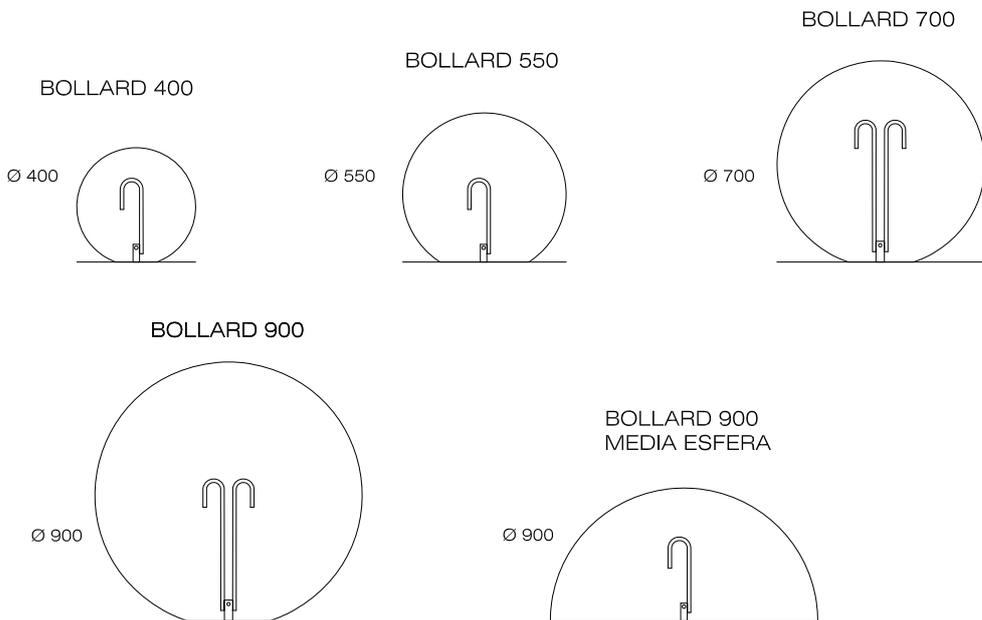

Bollard Buzo 700

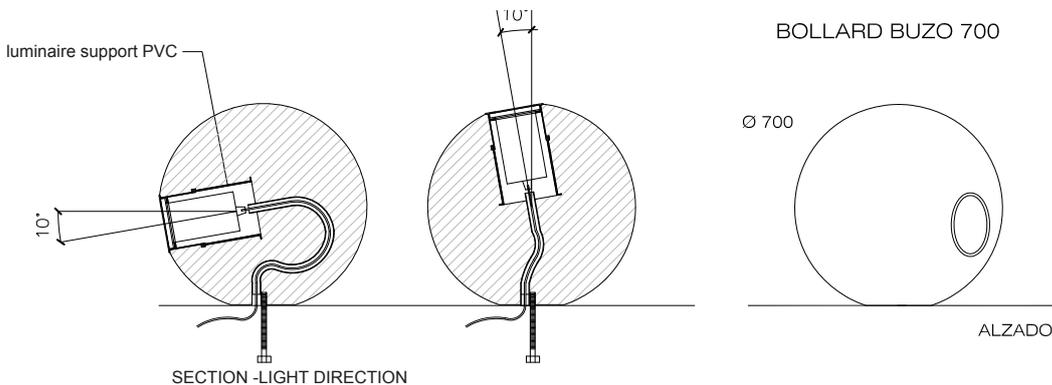



Warranty

5 years in concrete elements.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com



GA-2005/0072 SST-0090/2010 ER-0403/2016