

Domus is a project by Ramón Úbeda and Otto Canalda that brings singular new features to site furnishings thanks to UHPC concrete technology, which allows the idea of a “shelter” in a single piece to be made real, so that the bench itself is not only formed by a seat, it provides shelter from the rain and shade in the summer.

UHPC |  225 cm/max. |  1760 kg |  3

 Update 08.04.2021



Origin

The “Shelter” concept is at the origin of this site furnishing element that becomes an archetype in its field, just as *Domus*, the Roman home, is an exemplary standard in the architectural history of mankind.

Functional

Domus incorporates singular concepts into site furnishings. A bench in the sun is an impossible seat in many places, but thanks to the masterful combination of the material and the configuration that provides a roof, *Domus* generates a cooler microclimate in its interior.

Emotional

Domus exemplifies the importance of creating an emotional bond between brand and user, by appealing to the sentiments of the consumer. In this case the human factor stands out above all other issues, promoting interactive processes between its users.

Material

Single block of UHPC_Slimconcrete reinforced with stainless steel. Etched finish and colour in accordance with the standard *Escofet* colour chart.

Installation

Its low centre of gravity and the threaded sleeves inserted into its three lateral faces make it easy to handle and unload, in all cases in a vertical position. It is installed with anchors to the paving or ad hoc foundations.





DOMUS



Escofet®

DOMUS




Escofet®

1. Landscape Furniture

Domus	Shelter	Backless bench	
Dimensions	145x167x45 cm	152x76x45 cm	
Weight	1760 Kg	584 Kg	
1.1 General features			
Material	UHPC concrete	Fixing	Anchored with screws
Finish	Etched and waterproofed		


Colours




UHPC GR. Gris



UHPC NG. Noir



UHPC BL. Blanc



UHPC BG. Beige




1.2 Installation system

Hoisting


(W=1769 kg / 584 kg)

Installation Shelter


Tightly screwed the 2 stud bolts M16x140. Then drill pavement (Ø40x180) and fill with resin. Finally center and caulk the bench foot all around.

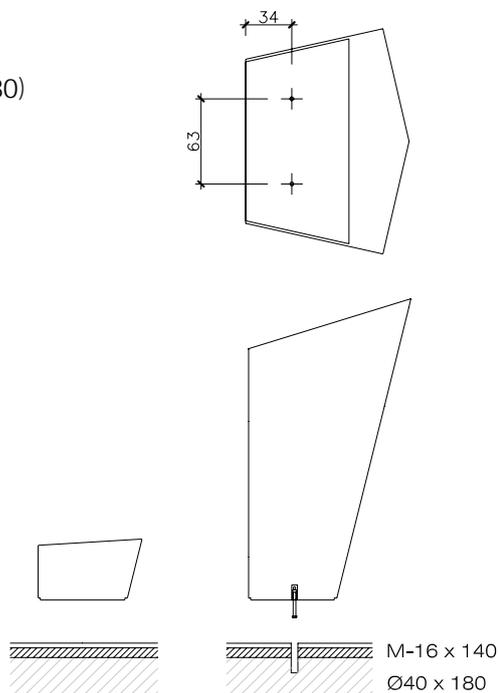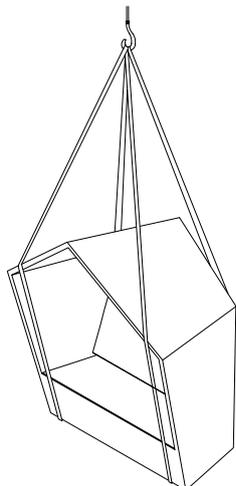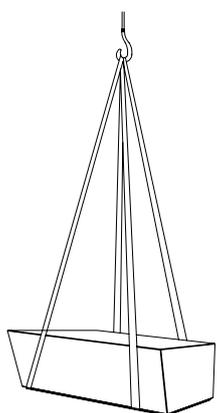

Shelter

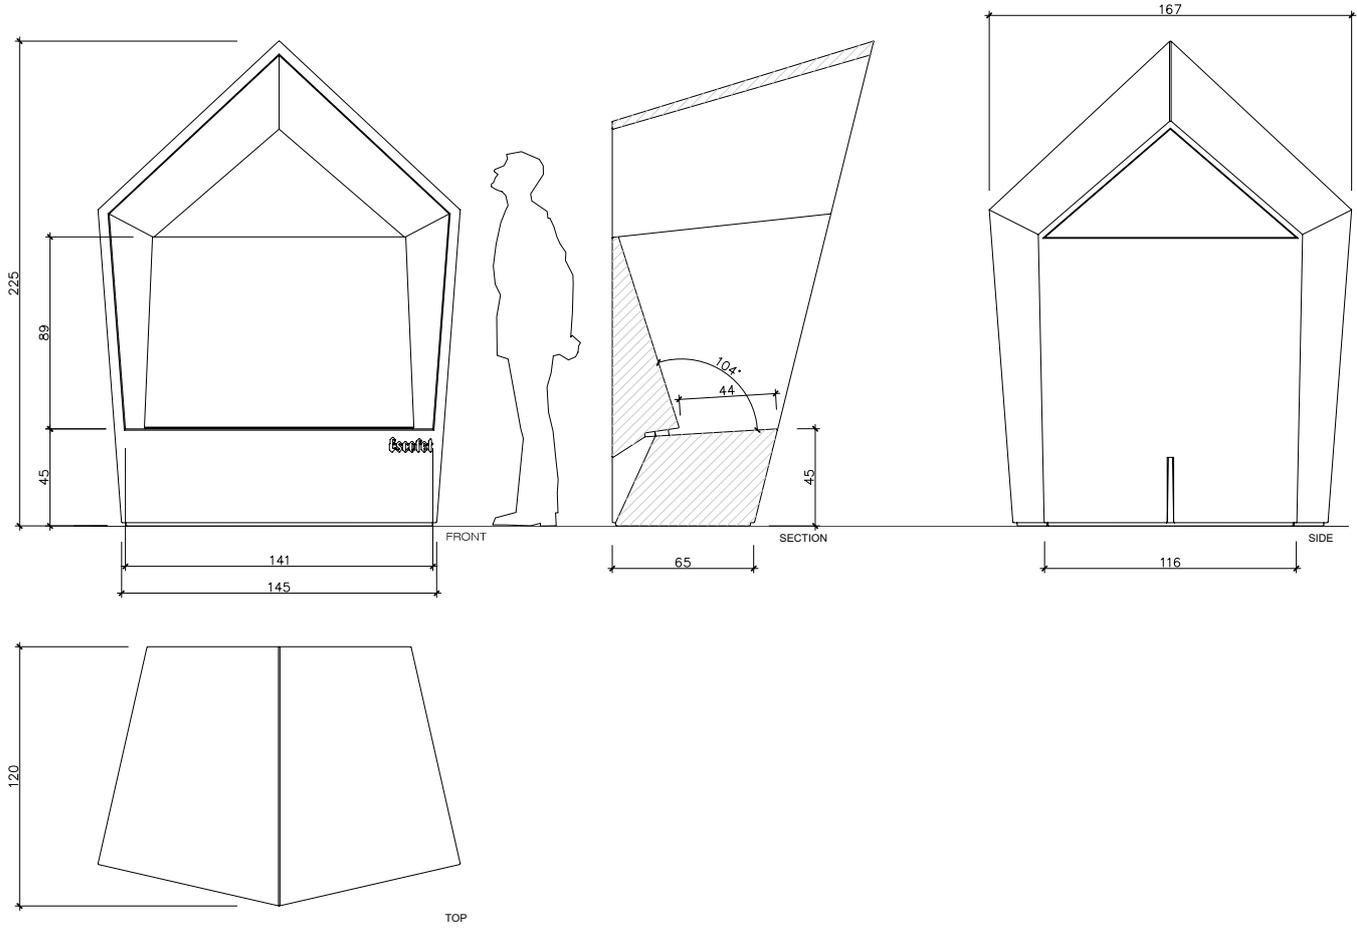

Backless bench

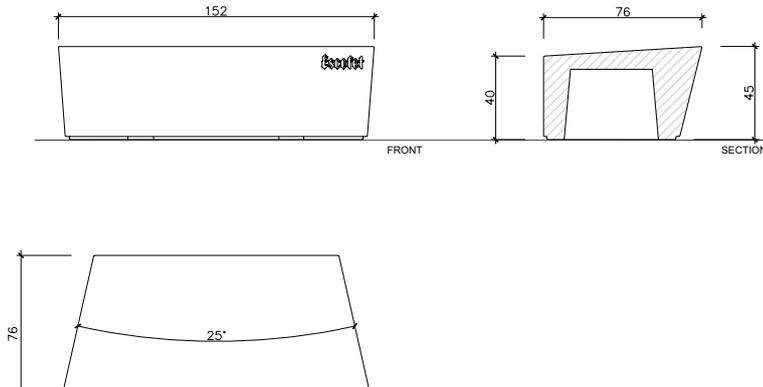



Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Follow us

