
The *Kanji* bench range provides a seat as a complement to all those elements of public areas that have not been initially designed for such a function, such as walls or steps. It also serves as an accessory for the Escofet concrete benches collection. With a silver-painted or stainless-steel structure and FSC® tropical wood or Glass Fibre Reinforced Polyester slats, the family is made up of a 60 cm chair and a 180 cm bench with or without a backrest.

FSC® Certified Wood | 🖸 180 cm/max | 📥 33 kg | 🖫 4

### C Update 26.01.2022



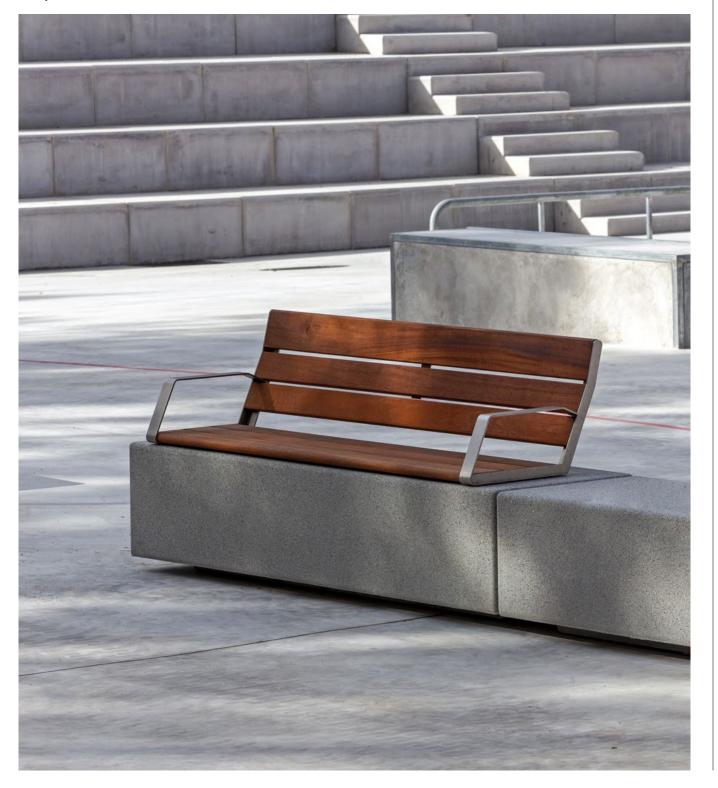

A kanji is a Chinese character that is used in Japanese writing, where each has its own meaning but may be interpreted in different ways, depending on its context and combination. The *Kanji* seat accessories collection for use in public areas was designed in accordance with this desire for adaptability and versatility.

### Versatile

Kanji is intended for universal use, providing an ergonomic seat with multiple options in terms of the finish. It is designed for installation on walls built on site, and as a complement to most backless bench models from the *Escofet* catalogue, such as *Sócrates*, *Longo*, *Box*, *Garonne* and *Godot*, among others.

#### Materials


The support structure is made from machined steel plate with a thickness of 6 mm, zinc-plated and with a painted silver or polished stainless-steel finish. The seats are made from FSC® certified tropical wood or GFRP slats RAL 7047-coloured, supplied with or without a back and in two lengths: 60 cm and 180 cm.

### Installation


Concealed permanent anchoring to a wall or a bench with stainless steel screws and metal expansion plugs.





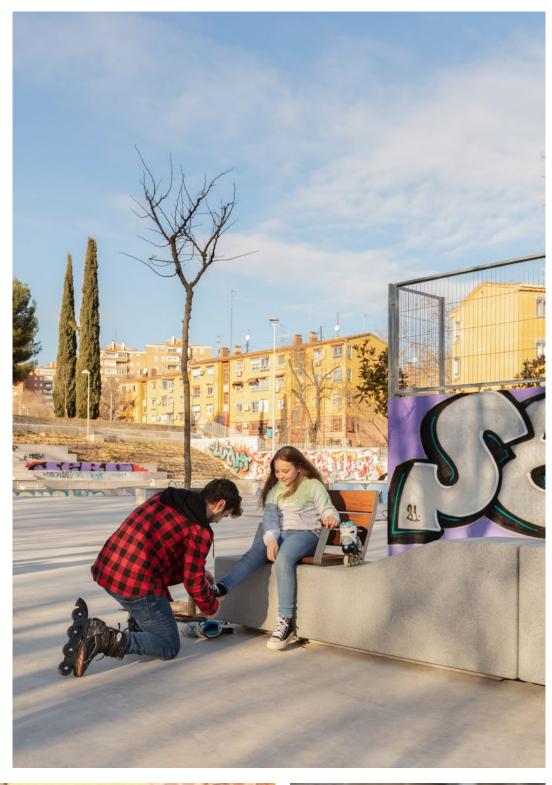






# 1. Accessory for backless benches

Kanji	Bench Ch	nair	Backless bench	Seat
Dimensions	177 x 57 x 4 (43) cm 62	x 57 x 4 (43) cm	177 x 53 x 4 cm	62 x 53 x 4 cm
Weight	33 kg 17	kg	20 kg	9 kg
1.1 General features				
Seat	Tropical wood FSC <sup>®</sup> / Glass Fibre Reinforced P	Tropical wood FSC <sup>®</sup> / Glass Fibre Reinforced Polyester slats		Anchored with expansion bolts
Finish	Oil treated / GFRP colour RAL 7047. Optional RAL colour chart +20 uds			
Supports	Zinc plated steel / Stainless steel			
Finish	Textured Silver coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2. Optional RAL color chart. / Stainless steel finish			
Colours  FSC www.fsc.org FSC* C019143  La marca de la gestión forcetal responsable				_
	A. Tropical wood FSC®	B. GFRP o		
	<b>C.</b> Textured Silver steel	<b>D.</b> Stainles	s steel	

### 1.2 Installation system


### Installation


Center and place the accessory on the bench or wall and mark holes. Drill  $\emptyset$  8mm the bench or wall. Refit the accessory and screw the 6 or 4 stainless steel 8 x 45 mm expansion bolts.

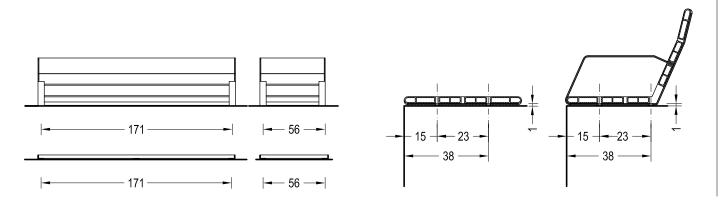





## 1.3 Geometry

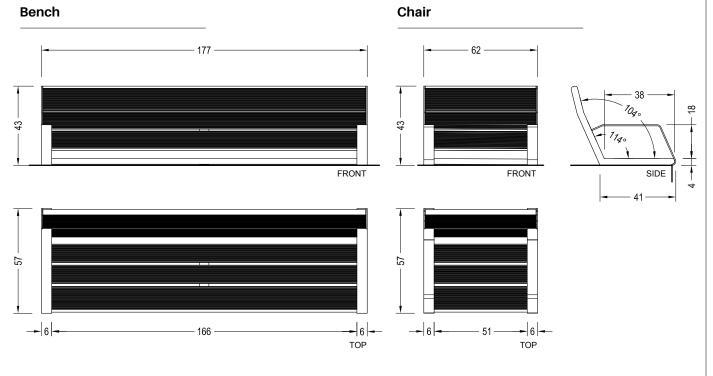


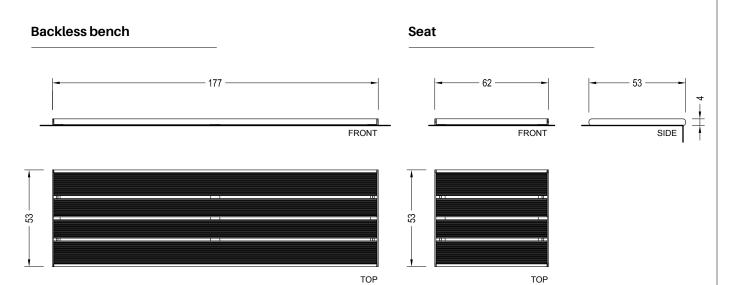

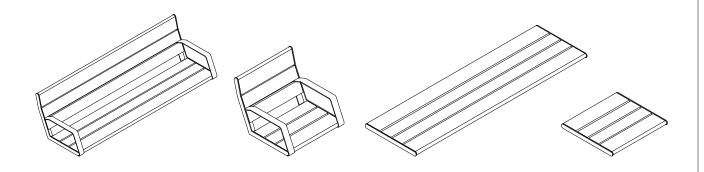

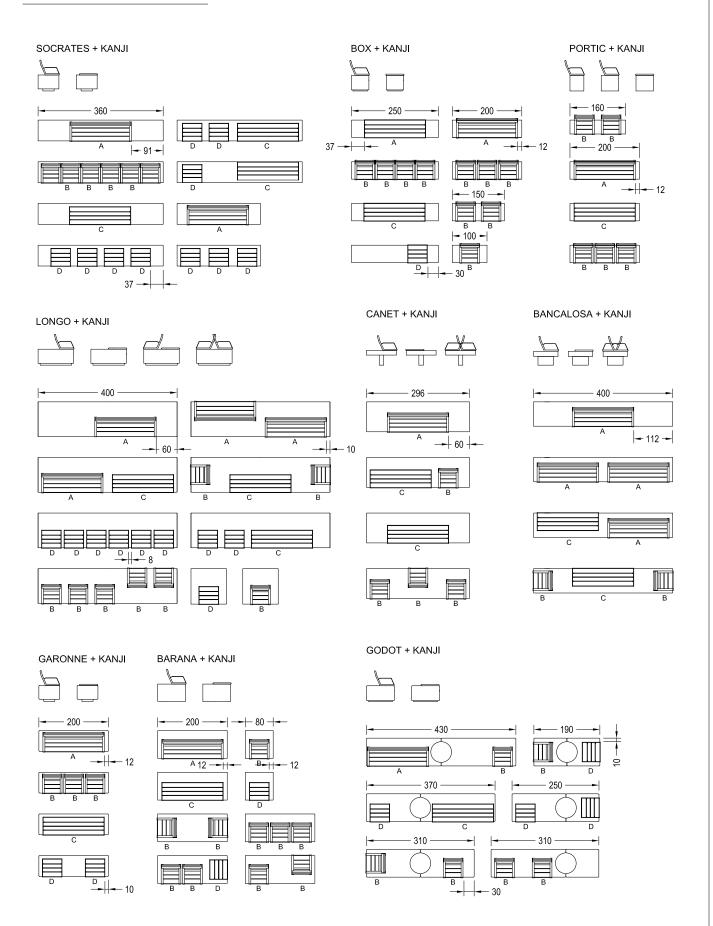



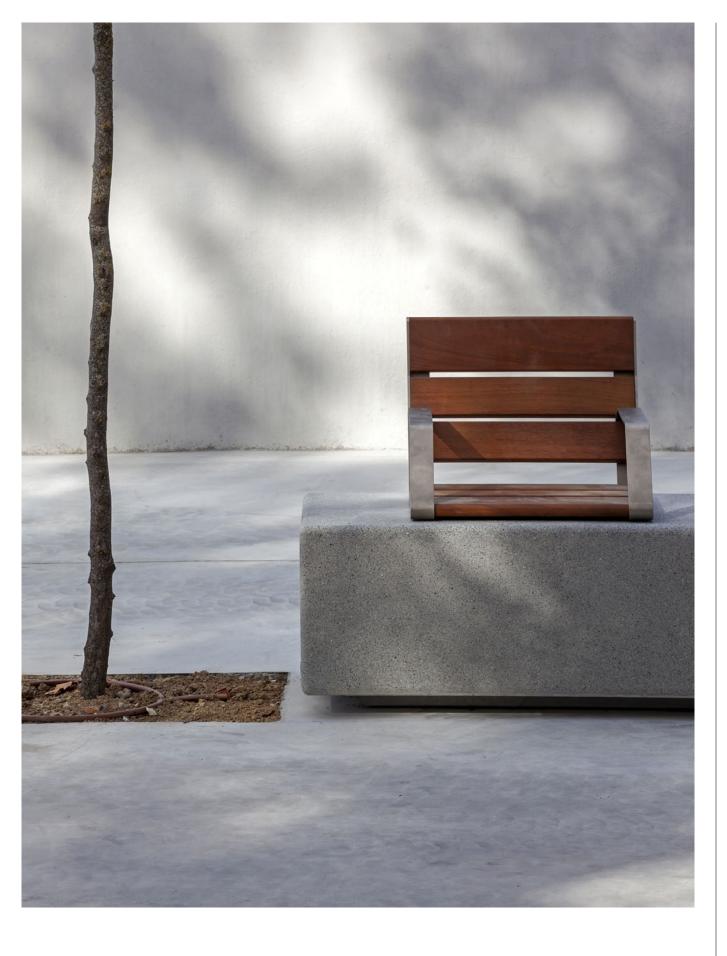



The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A Head office and production

Montserrat, 162 E 08760 Martorell Barcelona - España T. 0034 937 737 150 F. 0034 937 737 151

info@escofet.com
www.escofet.com









