


CARACTERÍSTICAS / CHARACTERISTICS

MATERIAL hormigón armado
COLOR carta de colores estándar
ACABADO decapado suave e hidrofugado
COLOC. apoyado sin anclaje (A)
PESO anclado con tornillos (B y C)
 3000 kg / 1500 kg



MATERIAL reinforced concrete
COLOUR standard colour chart
FINISH soft etched and waterproofed
FIXING free-standing (A)
WEIGHT anchored with screws (B and C)
 3000 kg / 1500 kg

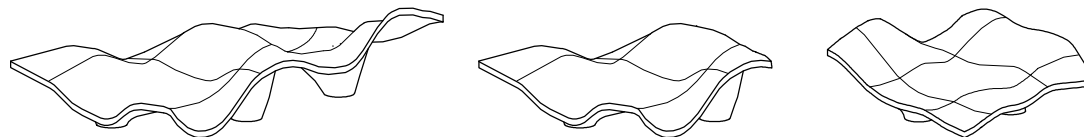

Update 14/02/2022
 Cotas / Sizes cm

INSTALACIÓN / INSTALLATION

GEOMETRÍA / GEOMETRY

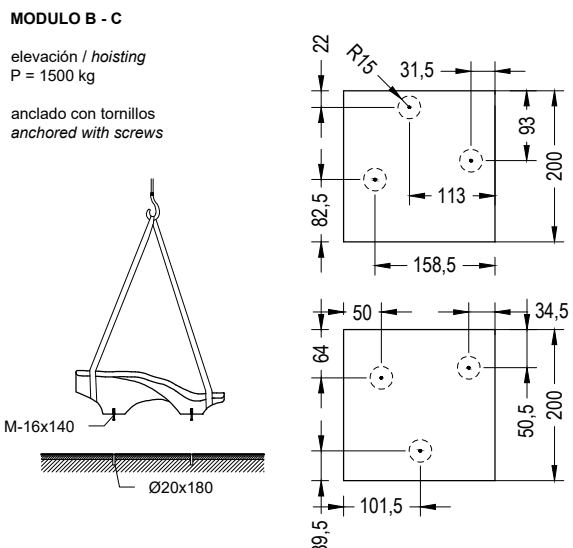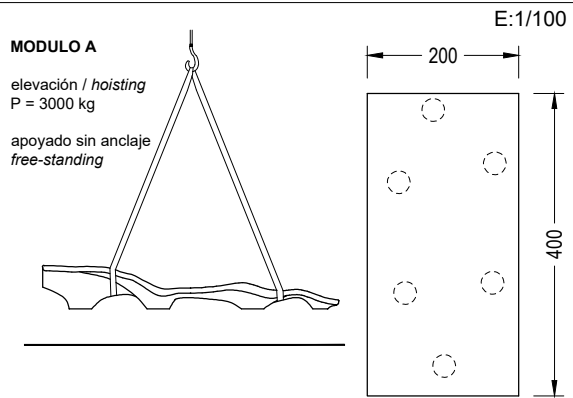

Roscar los 3 tornillos a fondo M-16x140. Taladrar el pavimento (Ø20x180) y llenar con resina o mortero rico. Centrar y colocar.
 Tightly screw the 3 stud bolts M-16x140. Drill pavement (Ø20x180) and fill with resin or fat mortar. Centre and caulk.

La base de apoyo debe ser plana, lisa, rígida y confinada, capaz de sustentar el peso. Los soportes deben permanecer en total contacto con la superficie de apoyo, mediante elementos de nivelación o mortero.
 The foundation must be flat, smooth, rigid and confined, capable of supporting the weight. The supports must remain in full contact with the support surface, by means of levelling elements or mortar.

LUNGO MARE A

