


CARACTERÍSTICAS / CHARACTERISTICS

MATERIAL polietileno HDPE
COLOR carta de colores estándar
ACABADO micro-texturado
COLOC. anclado / apoyado sin anclaje
PESO 45 kg / 15 kg / 9 kg
ILUMINACIÓN perfiles led, banca 57w /
 respaldo 15w / cubo 15w
 temp. color: 3000 K o 4000 K

MATERIAL polyethylene HDPE
COLOUR standard colour chart
FINISH micro-textured
FIXING anchored / free-standing
WEIGHT 45 kg / 15 kg / 9 kg
LIGHTING led strips, backless bench 57w /
 backrest 15w / cube 15w
 color temperature: 3000 K or 4000 K

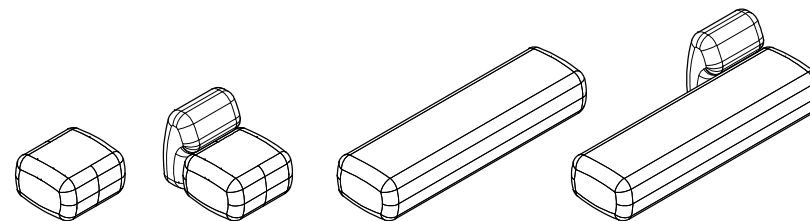

Update 04/07/2025
 Cotas / Sizes cm


INSTALACIÓN / INSTALLATION

1. INDOOR sin anclaje / free standing

2. OUTDOOR anclado / anchored

- ① placa con 2 varillas soldadas
M12x260
plate with 2 threaded bars
M12x260
- ② 2 arandela plana M12
2 flat washer M12
- ③ 2 glowler DIN 127 M12
2 glowler DIN 127 M12
- ④ 2 tuerca DIN 1587 M12
2 nut DIN 1587 M12

- ⑤ tapa registro roscada Ø148
threaded inspection hatch Ø148
- ⑥ tapa registro roscada Ø200
threaded inspection hatch Ø200
- ⑦ Tornillos DIN 7505-A Torx
Bolt DIN 7505-A Torx
- ⑧ tornillo M6
screw M6
- ⑨ fijador lateral M5
side fastener M5
- ⑩ casquillo para pavimento M6
threaded bushing pavement M6
- ⑪ 2 patinetes
2 scooters

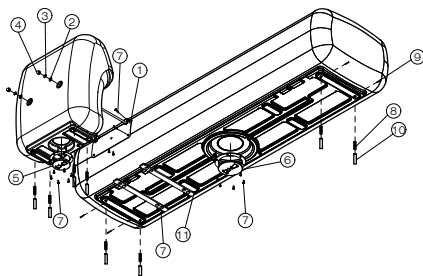


Oculto y Removible. Roscar tornillo M6 a casquillo subministrado. Posicionar conjunto de casquillo + tornillo en orificios preexistentes en el banco. Atornillar 4 fijadores laterales M5 hasta presionar el tornillo M6. Girar banco, marcar posicionamiento. Taladrar el pavimento (Ø20), llenar con resina y colocar banco.
Hidden and Removable. Screw the M6 screws into the bushing supplied. Place the bushing+screw kit in the existing holes in the bench. Screw in 4 M5 side fasteners until the M6 screw is tight. Rotate the bench, mark the position. Drill holes in pavement (Ø20), fill with resin or fat mortar and place the bench.

Opcionalmente, para incrementar el peso, el cliente puede lastrarlo con arena.
 Optionally, to gain weight, the customer can ballast it with sand.

La banca SIT se entrega desmontada del accesorio respaldo SIT, excepto en el caso de los modelos RBN con LED, los cuales se entregan montados.
 The SIT bench is always delivered disassembled from the backrest accessory, except in the case of RBN models with LED, which are delivered assembled.


VISTA INFERIOR COMPONENTES COMPONENTS BOTTOM VIEW

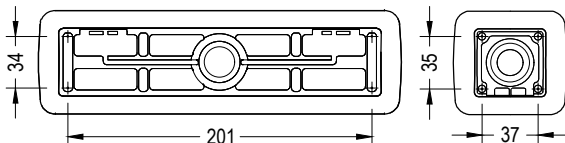

GEOMETRÍA / GEOMETRY


E:1/50

SIT banca / backless bench

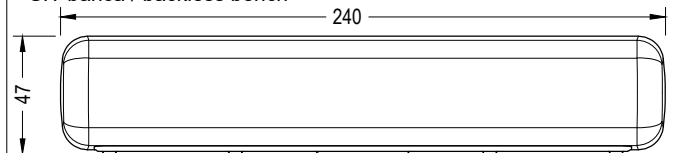


FRONTAL
 FRONT

LATERAL
 SIDE

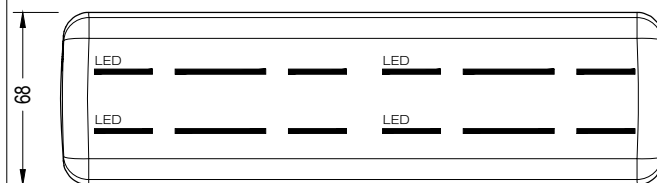


PLANTA
 TOP

SIT banca con respaldo / backless bench with backrest

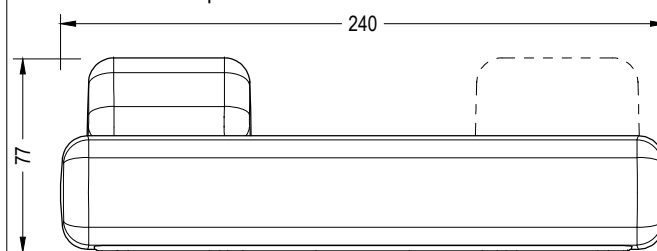


FRONTAL
 FRONT

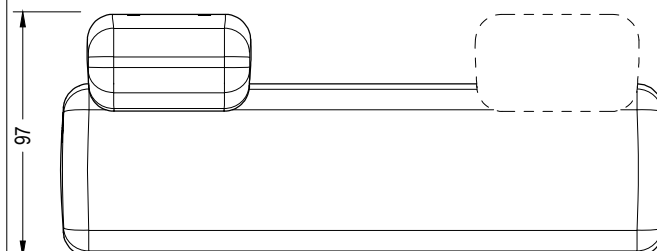


PLANTA
 TOP

SIT cubo / cube

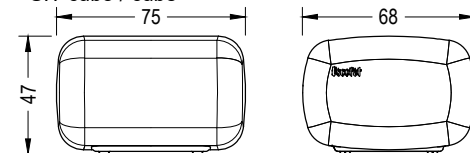


FRONTAL
 FRONT

LATERAL
 SIDE




PLANTA
 TOP

SIT respaldo / backrest

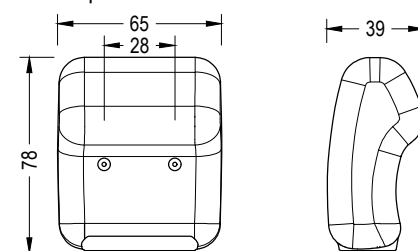

FRONTAL
 FRONT

LATERAL
 SIDE



PLANTA
 TOP

Este material ofrece gran resistencia y durabilidad, no obstante, es posible que pueda sufrir ligeras deformaciones con el tiempo en casos de exposición prolongada al sol, altas temperaturas o uso intensivo. Estas variaciones no comprometen la funcionalidad del producto. / This material offers great strength and durability; however, it may experience slight deformations over time when exposed to prolonged sunlight, high temperatures, or intensive use. These variations do not compromise the functionality of the product.