

CARACTERISTICAS


- 1. columna troncocónica (conicidad 12,5 %) de:
 - a. acero galvanizado (e=4mm); K-15 (e=5mm)
 - b. acero corten (e=5mm)
 - 2. puertas de registro y cerramiento con llave de tubo rectangular.
 - 3. placa de fijación con 8 cartelas y anillo de refuerzo. pernos roscados de anclaje con doble tuerca y arandelas de acero inox.
 - 4. proyectores circulares ASTRO LED DISANO 94W, 125W o 187W IP66 4000K CRI70 / 1-10V Opcional. Carcasa de aluminio
 - 5. cimentación con dado de hormigón
- PESO K-10: 213kg / K-12:284kg / K-15: 422kg

- 1. tapered column (taper 12.5%) made of:
 - a. galvanized steel (e=4mm); K-15 (e=5mm)
 - b. corten steel (e=5mm)
 - 2. inspection hatch and lock with rectangular tube key
 - 3. base plate with 8 mounting brackets and reinforcement ring threaded anchor bolts with double nut and stainless steel washers.
 - 4. circular projector. Projector ASTRO LED DISANO 94W, 125W o 187W IP66 4000K CRI70 / 1-10V optional. Aluminium housing
 - 5. concrete block foundation
- WEIGHT K-10: 213kg / K-12:284kg / K-15: 422kg


DISEÑO / DESIGN Olga Tarrasó, Jordi Henrich, Jaume Artigues, Miquel Roig

GEOMETRIA


ESCALA 0 CM 200 CM

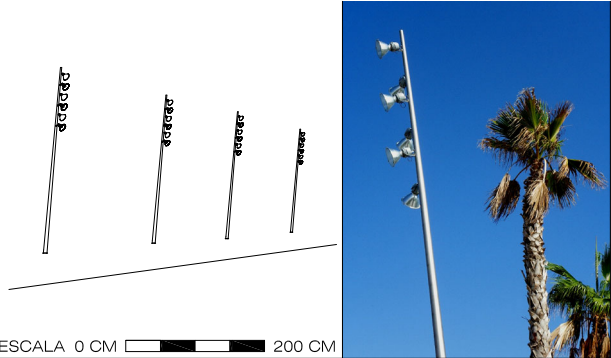

SISTEMA DE COLOCACION

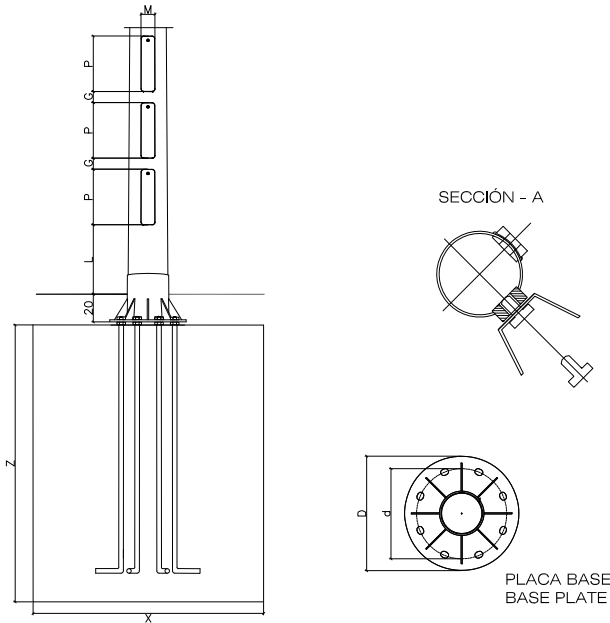

COLUMNAS columns		H=10 m	H=12 m	H=15 m
	ø SUP	77 mm	88 mm	102 mm
	ø INF	202 mm	238 mm	290 mm
	L	500 mm	500 mm	500 mm
PUERTAS REGISTRO inspection hatch		2	2	3
	P	400 mm	400 mm	400 mm
	M	100 mm	100 mm	100 mm
	G	80 mm	80 mm	80 mm
PLACA BASE base plate				
	pernos (8)	M-22x700	M-24x800	M-24x800
	D	550mm	550mm	550mm
	d	425mm	425mm	425mm
	E	15mm	15mm	20mm
CIMENTACIÓN (dim. orientativas) foundation (approx. dimensions)				
	X	90 cm	150 cm	150 cm
	Y	90 cm	150 cm	220 cm
	Z	120 cm	150 cm	180 cm
PROYECTORES projectors		3	4	6

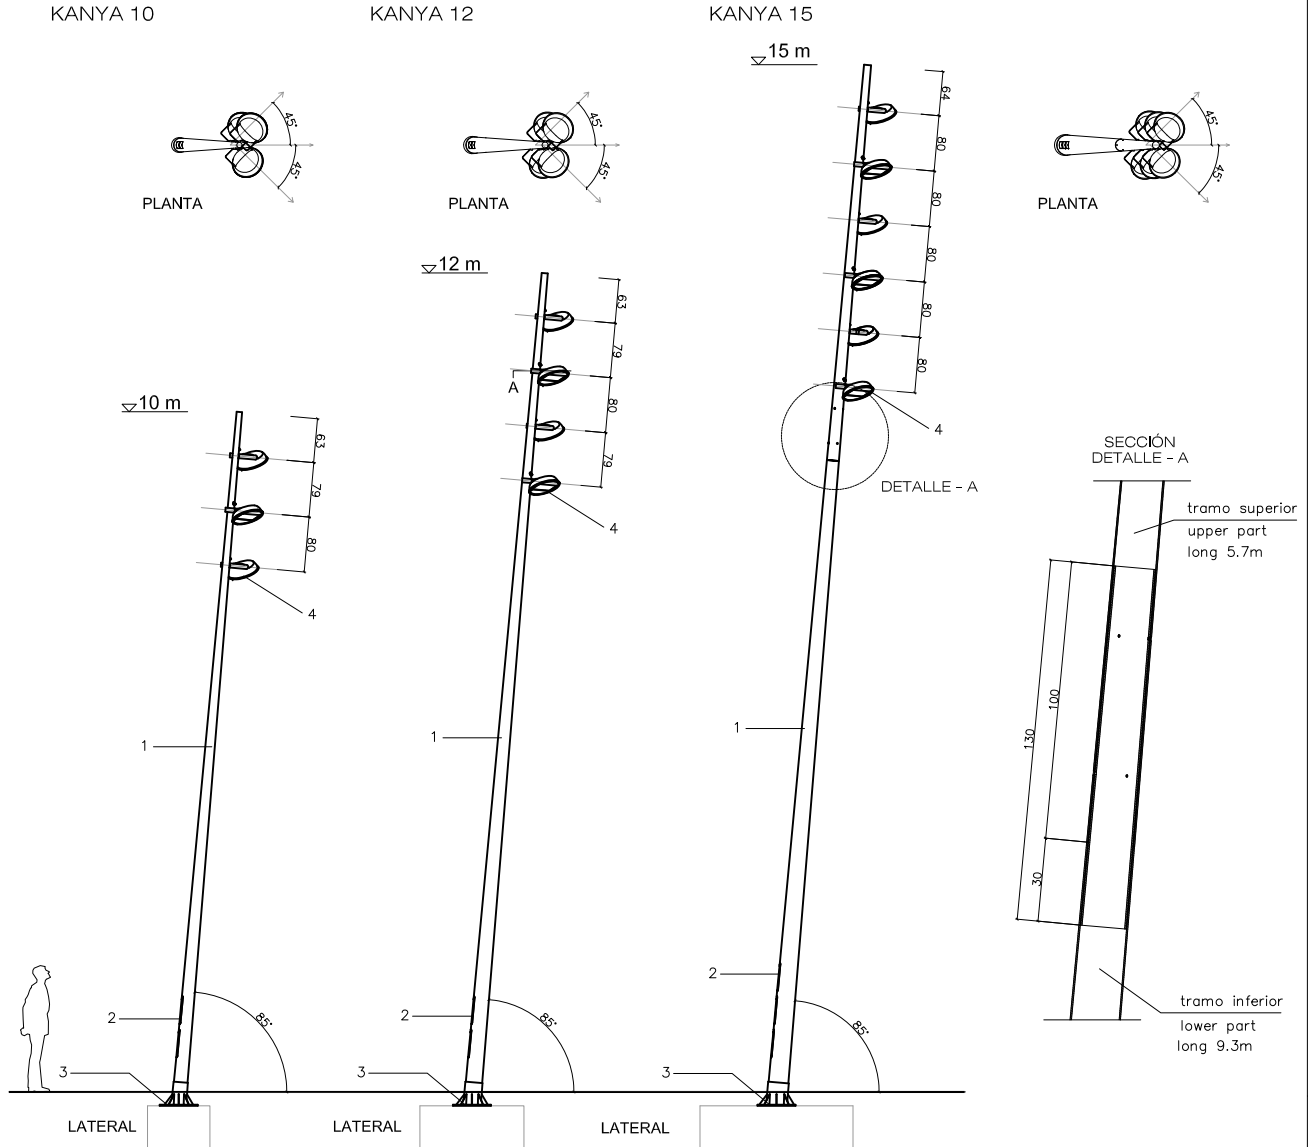

CARACTERISTICAS

- 1. columna troncocónica (conicidad 12,5 %) de:
 - a. acero galvanizado (e=5mm)
 - b. acero corten (e=5mm)
 - 2. puertas de registro y cerramiento con llave de tubo rectangular.
 - 3. placa de fijación con 8 cartelas y anillo de refuerzo. pernos roscados de anclaje con doble tuerca y arandelas de acero inox.
 - 4. proyectores circulares ASTRO LED DISANO 94W, 125W o 187W IP66 4000K CRI70 / 1-10V Opcional. Carcasa de aluminio
 - 5. cimentación con dado de hormigón
- PESO K-18: 510 Kg


- 1. tapered column (taper 12.5%) made of:
 - a. galvanized steel (e=5mm)
 - b. corten steel (e=5mm)
 - 2. inspection hatch and lock with rectangular tube key
 - 3. base plate with 8 mounting brackets and reinforcement ring threaded anchor bolts with double nut and stainless steel washers.
 - 4. proyectores circulares ASTRO LED DISANO 94W, 125W o 187W IP66 4000K CRI70 / 1-10V Opcional. Carcasa de aluminio
 - 5. concrete block foundation
- WEIGHT K-18: 510 Kg

DISEÑO / DESIGN Olga Tarrasó, Jordi Henrich, Jaume Artigues, Miquel Roig


SISTEMA DE COLOCACION

GEOMETRIA

ESCALA 0 CM 200 CM

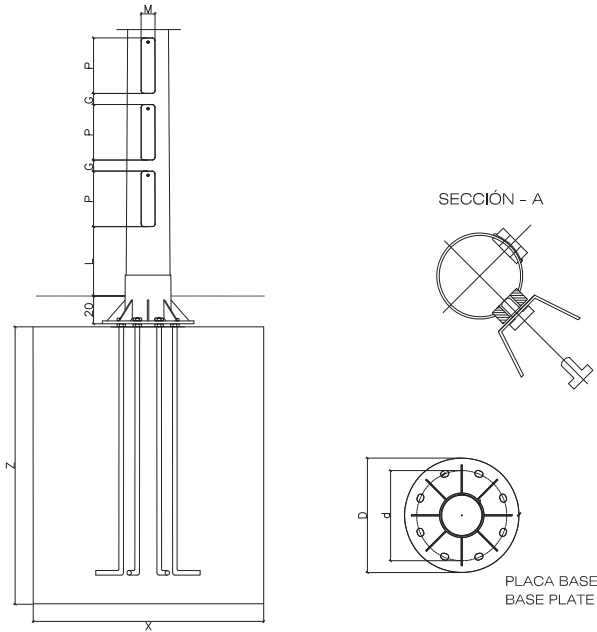

COLUMNAS columns	H=18 m
	ø SUP 88 mm
	ø INF 321 mm
	L 500 mm
PUERTAS REGISTRO inspection hatch	3
	P 400 mm
	M 100 mm
	G 80 mm
PLACA BASE base plate	pernos (8) M-24x800
	D 660mm
	d 543mm
	E 20mm
CIMENTACIÓN (dim. orientativas) foundation (approx. dimensions)	X 160 cm
	Y 160 cm
	Z 180 cm
PROYECTORES projectors	6

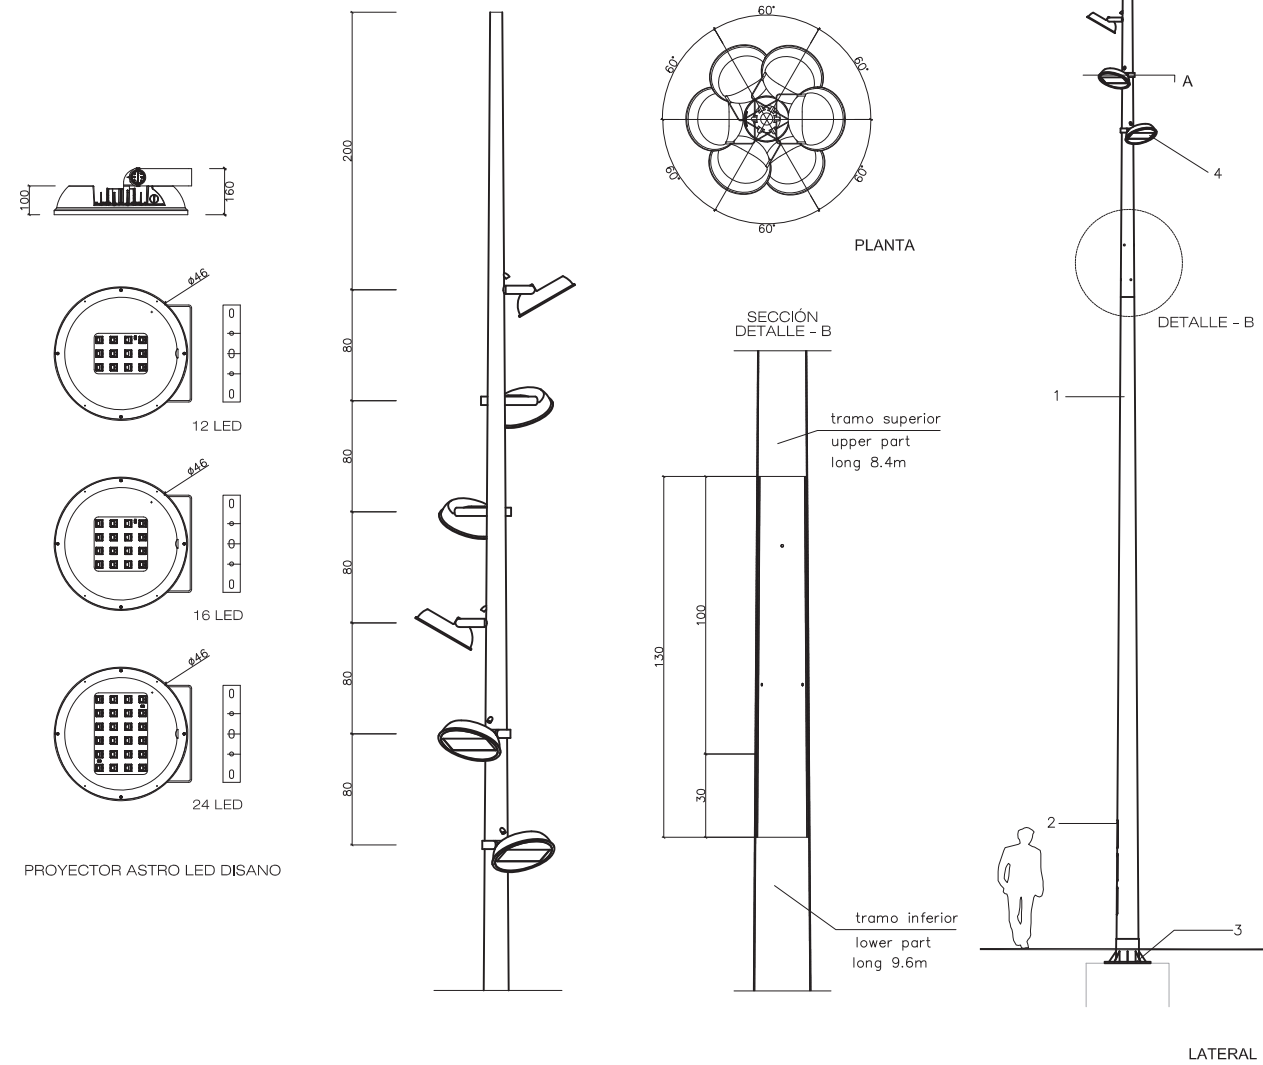

KANYA 18 recta

18 m