


CARACTERISTICAS

MATERIAL	Pino Nórdico FSC®	MATERIAL	Nordic pinewood FSC®
ACABADO	tratamiento al autoclave y protección fungicida	FINISH	high-pressure treated and fungicide protection
SOPORTES	acero zincado y pintado color plata texturizado	SUPPORTS	zinc plated steel textured silver coated finish
COLOC.	anclado con tornillos	FIXING	anchored with screws
PESO	40 / 65 / 85 kg	WEIGHT	40 / 65 / 85 kg
PALET	230x80 (4uni.) / 210x80 (2uni.)	PALLET	230x80 (4units) / 210x80 (2units)

DISEÑO / DESIGN Josep Muxart

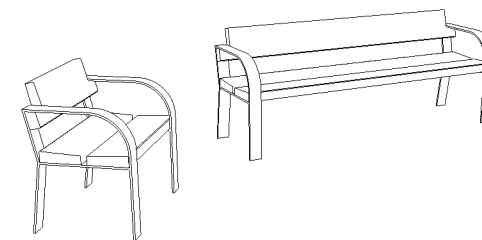


SISTEMA DE COLOCACION


GEOMETRIA

ESCALA 0 CM 50 CM


elevación / hoisting
(P= 40 Kg.)

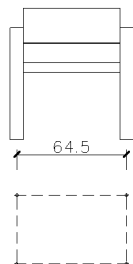


elevación / hoisting
(P= 65 Kg.)

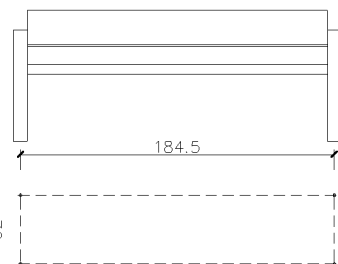

elevación / hoisting
(P= 85 Kg.)

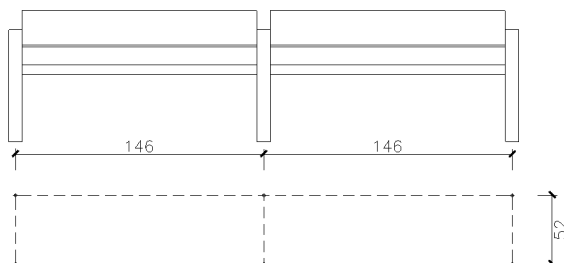

taladrar el pavimento Ø14mm y llenar con resina
drill pavement Ø 14mm and fill with resin



-roscar los 4 tornillos a fondo M6x100
-tightly screw the 4 stud bolts M6x100

centrar, colocar el banco y rejuntar la zona de apoyo
centre and caulk the bench foot all around

