


CARACTERÍSTICAS / CHARACTERISTICS

MATERIAL hormigón
COLOR carta de colores estándar
ACABADO decapado e hidrofugado
COLOC. anclado con tornillos
ILUMINACION Tira Led 8-15 W/m; 4000°K / 3000°K
DRIVER 24 V / 1,5A / IP67
PESO Soc 60: 224 kg / Soc 90: 550 kg /
 Soc 120: 1081kg

MATERIAL cast stone
COLOUR standard colour chart
FINISH etched and waterproofed
FIXING anchored with screws
LIGHTING Led Strip 8-15 W/m; 4000°K / 3000°K
DRIVER 24 V / 1,5A / IP67
WEIGHT Soc 60: 224 kg / Soc 90: 550 kg
 Soc 120: 1081kg

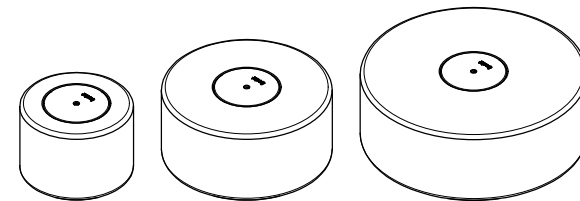


Update 26/05/2025
 Cotas / Sizes cm


INSTALACIÓN / INSTALLATION

elevación / hoisting
 P = 224 kg / 550 kg / 1081kg

elevación con eslingas
 de poliéster / hoisting
 with polyester slings

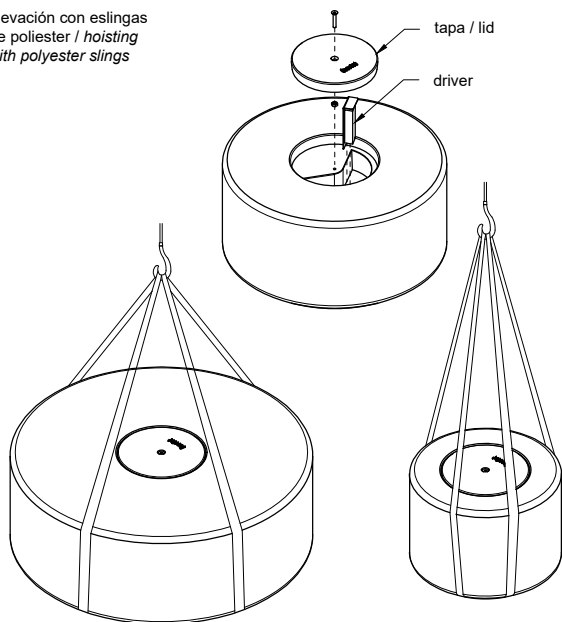

E:1/30

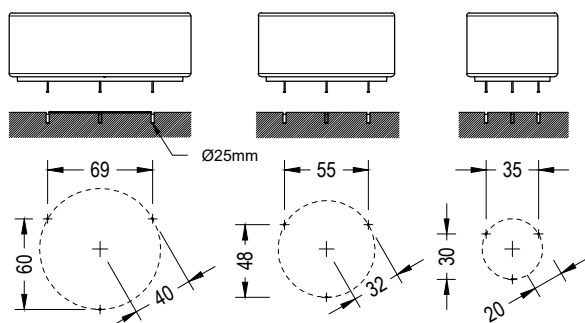



roscar 3 tornillos a fondo (Ø12 x 140 mm)
 tightly screw 3 stud bolts (Ø12 x 140 mm)

taladrar el pavimento y rellenar de resina o mortero rico
 drill the pavement fill with resin or fat mortar

E:1/50

GEOMETRÍA / GEOMETRY

SOC 60


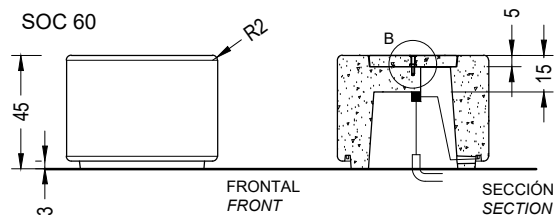


PLANTA
 TOP




INFERIOR
 BOTTOM

SOC 90


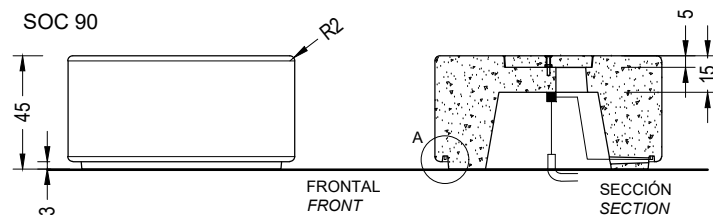


PLANTA
 TOP




INFERIOR
 BOTTOM

SOC 120

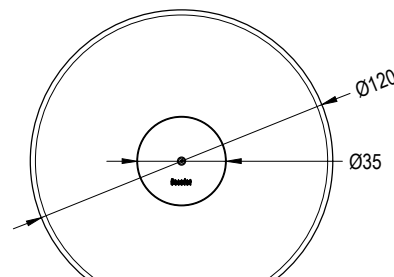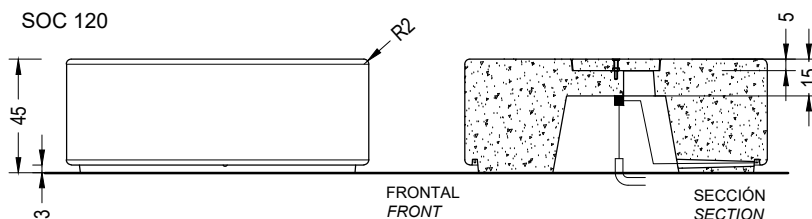


PLANTA
 TOP




INFERIOR
 BOTTOM

tornillo M-12
 screw M-12



rosca M-12
 thread M-12

DETALLE B
 DETAIL B

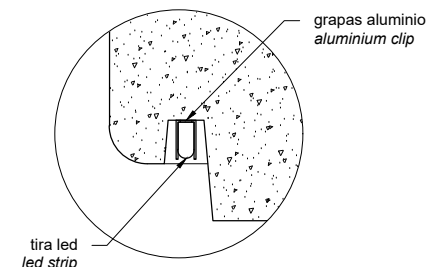

tira led
 led strip


DETALLE A
 DETAIL A

grapas aluminio
 aluminium clip

CARACTERÍSTICAS / CHARACTERISTICS

MATERIAL hormigón
COLOR carta de colores estándar
ACABADO decapado e hidrofugado
COLOC. anclado con tornillos
PESO Soc-M 60: 300 kg
 Soc-M 90: 565 kg
 Soc-M 120: 892 kg

MATERIAL concrete
COLOUR standard colour chart
FINISH etched and waterproofed
FIXING anchored with screws
WEIGHT Soc-M 60: 300 kg
 Soc-M 90: 565 kg
 Soc-M 120: 892 kg

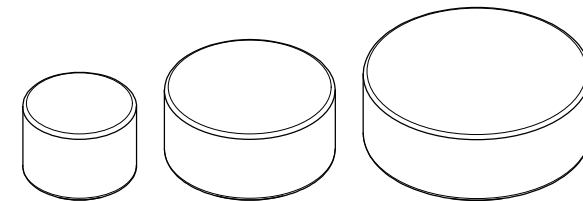


Update 07/09/2022
 Cotas / Sizes cm


INSTALACIÓN / INSTALATION

elevación / hoisting
 P = 300 / 565 / 892 kg

elevación con eslingas
 de poliéster / hoisting
 with polyester slings

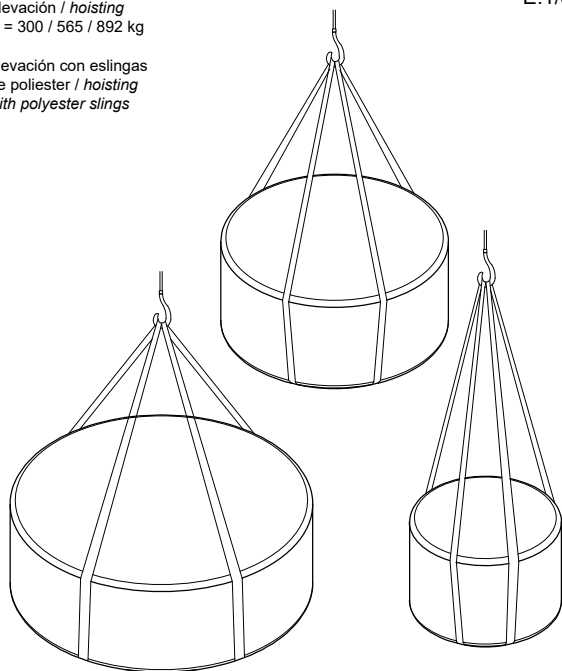







E:1/30

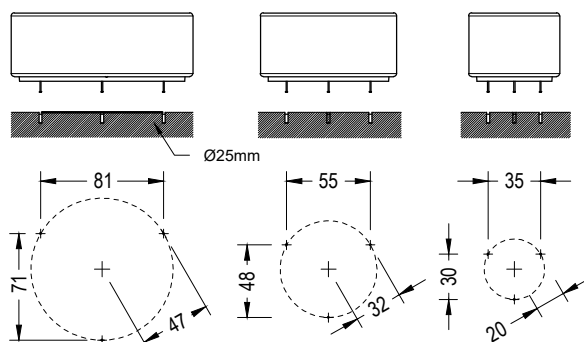

rosar 3 tornillos a fondo (Ø12 x 140 mm)
 tightly screw 3 stud bolts (Ø12 x 140 mm)

taladrar el pavimento y rellenar de resina o mortero rico
 drill the pavement fill with resin or fat mortar

GEOMETRÍA / GEOMETRY

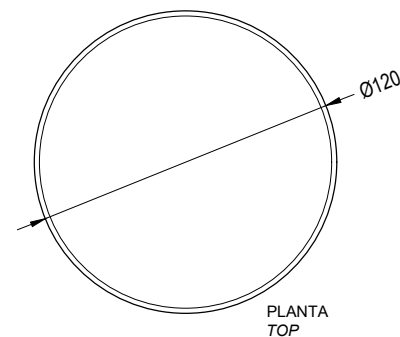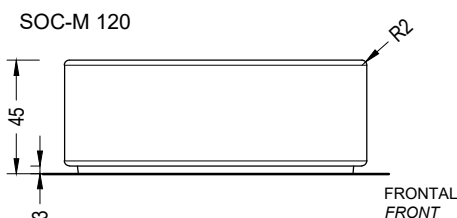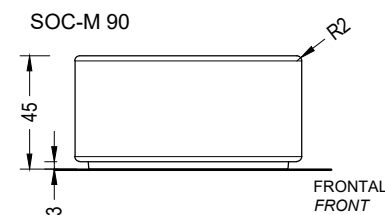

E:1/30