





KM.0 design has the distinguishing feature of not only providing a place of rest for passers-by, but as a place for installing signs: Routes, nature trails, sites of historical and cultural interest or distances between different origins, obtained through the use of new technologies. The optimal dimensions, with space for two people, diminishes its status as an obstacle, and its rounded edges guarantee friendly contact for users.

Concrete |  270 cm/max |  1745 kg/máx. |  5

 Update 28.07.2025



ORIGIN

KM.0 won first prize in the “Asiento4Sol” competition organised by COAM and Escofet for the design of new benches in the public area of Puerta del Sol, Madrid.

DESIGN

The formalisation of the bench as a landmark also provides a stimulus that interacts directly with passers-by, firmly anchored to the site and converting it into part of the citizen’s imagery.

MATERIAL

Etched, water-repellent concrete. Optional text, depending on design, recessed in bas relief.

INSTALLATION

Anchored to the paving with two M16 x 140 mm threaded bolts inserted into holes with a diameter of 40 mm filled with resin or fat mortar.

KM.0



**Its versatility
of use and free
arrangement of
the parts give
rise to multiple
configurations,
based on the
number of units.**



1. Backless bench

Km.0	
------	--








Dimensions	120 x 50 x 44 cm
------------	------------------

Weight	565 kg
--------	--------

1.1 General features

Material	Concrete Recycled Concrete	Fixing	Anchored with screws
----------	-------------------------------	--------	----------------------


Finish	Etched and waterproofed
--------	-------------------------

Colours			
	GR. Grey	NG. Black	BL. White
			
	CA. Grey CA	RA. Red	BG. Beige
			
	EGR. Eco-Grey®		




1.2 Installation system

Hoisting
W= 565 kg


Instalación
Drill pavement (Ø40) and fill with resin. Tightly screw the 4 stud bolts M16 x 140 mm. Center and caulk the bench foot all around.

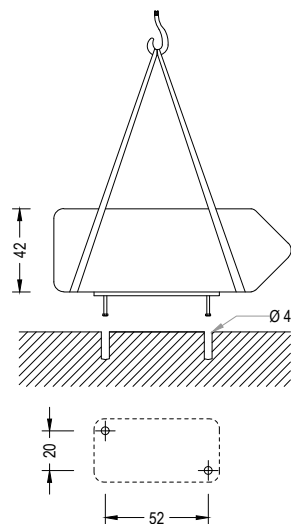

Km.0

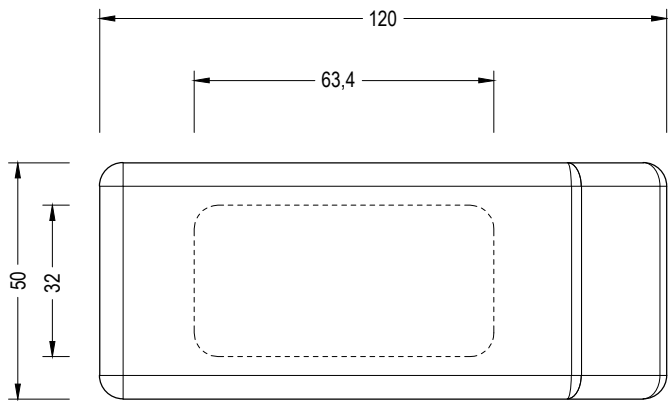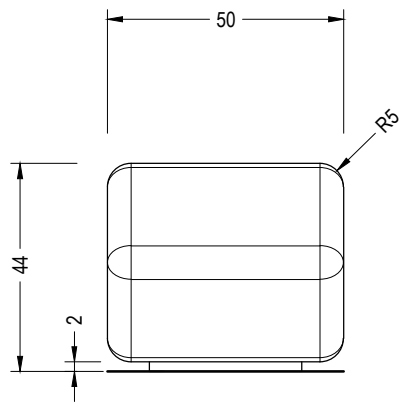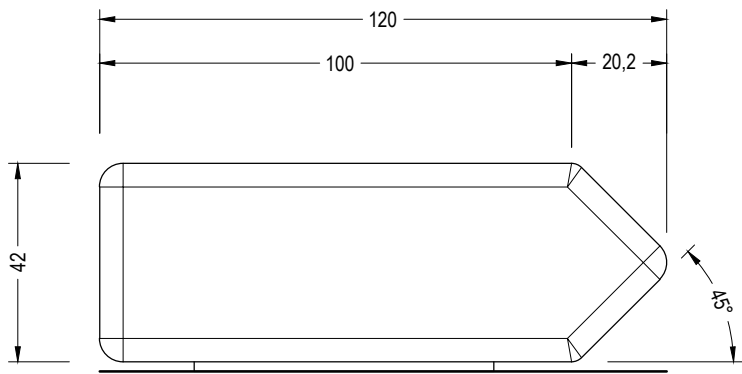

Text example

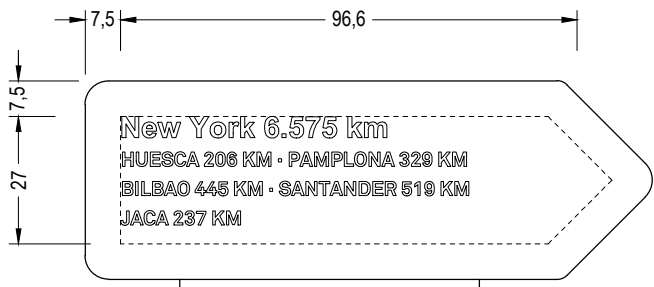



Warranty

5 years in all its components.


The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Escofet
by **Molins**®



GA-2005/0072



SST-0090/2010



ER-0403/2016

