
Prima is the first collection of a set of three combinable backless bench and table models produced and edited by Escofet_lab in UHPC-Slimconcrete, thereby initiating a new generation of lightweight, resistant urban elements.

UHPC | ☑ 300 cm/max | 📥 596 kg | 💃 6

C Update 22.07.2020



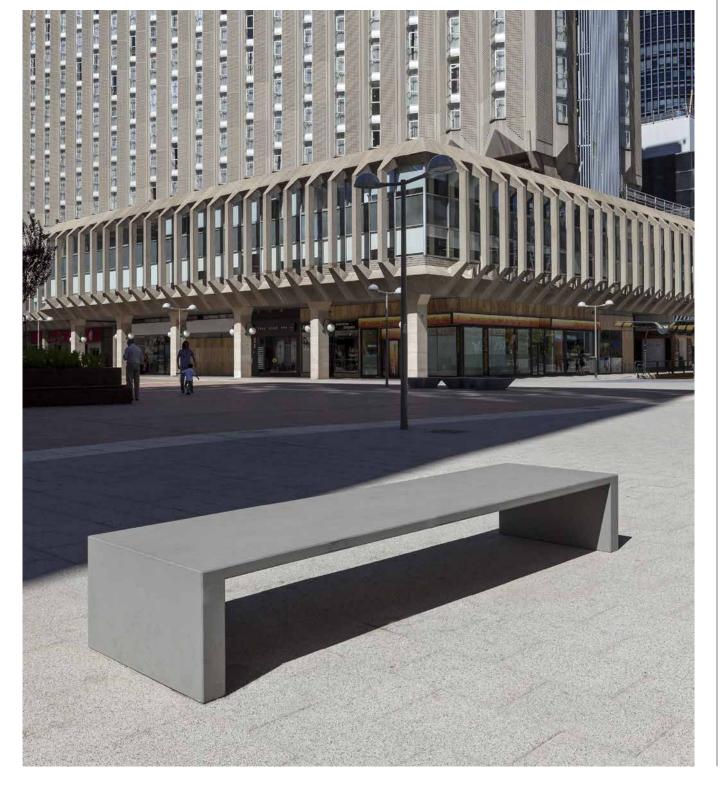

Robust

The UHPC-Slimconcrete technology allows for the design of extremely durable, lightweight elements with a minimum structural cross-section, due to their high resistance to compression, bending, impact and wear. The extremely low water absorption properties of this material improve its behaviour in the face of fragmentation due to freeze cycles in places with harsh climates.

Adaptable

The *Prima* collection has two bench formats, completed with a table. Its neutral, abstract design means it can easily be installed individually in any environment, in an aligned formation or in flexible arrangements consisting of tables, backless benches and seats.

Material

The lightweight nature of the UHPC-Slimconcrete products makes them easy to transport and reduces energy consumption in their fabrication. Their 100% recyclable material composition optimises their life cycle.

Installation

The four models can easily be lifted and handled with slings and can be installed with supports or optionally anchored to the paving. No specific foundation elements are required.






















1. Table, backless bench and stool

| Prima | Backless bench 220 | Backless bench 300 | Stool | Table |
|------------|-----------------------|-----------------------|-----------------|------------------|
| Dimensions | 220 x 45 x 60 cm | 300 x 45 x 82 cm | 60 x 45 x 60 cm | 220 x 75 x 90 cm |
| Weight | 275 kg | 596 kg | 132 kg | 508 kg |

1.1 General features

| Material | UHPC Concrete | Fixing | Anchored with screws |
|----------|------------------------------|------------------|----------------------|
| Finish | Etched and waterproofed / So | oft polished (*) | |

Colors

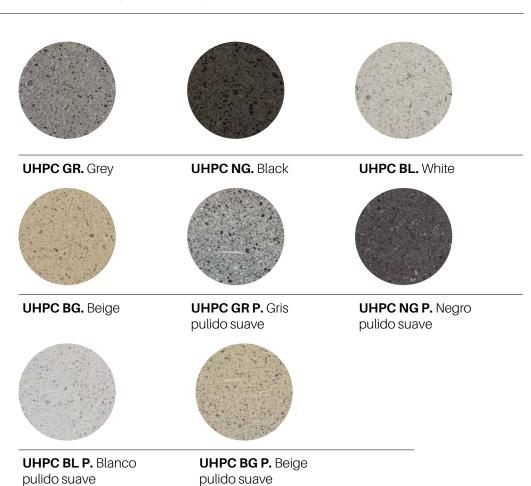


1.2 Installation system

Hoisting

(P=132 kg / 275 kg / 537 kg / 596 kg)

Installation


Tightly screw the 4 bolts M-12x140, then, drill pavement (Ø40x180) and fill with resin and finally, center and place.

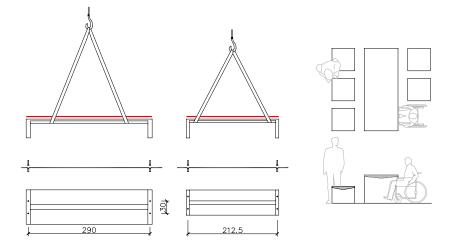


(*) The soft polished finish is only applied on the upper surface (see red line).




Prima 220

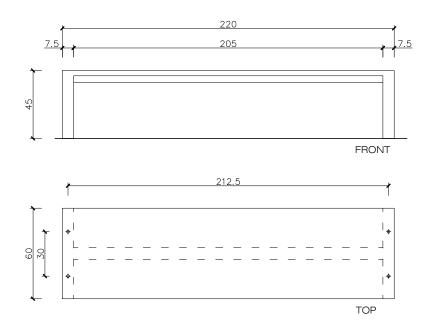


Prima 300

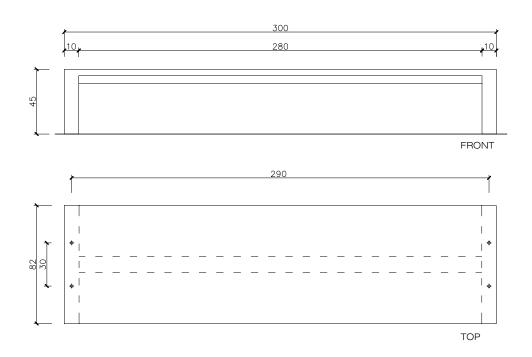



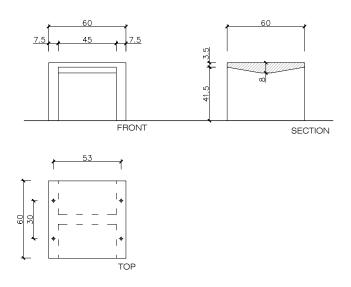

Table

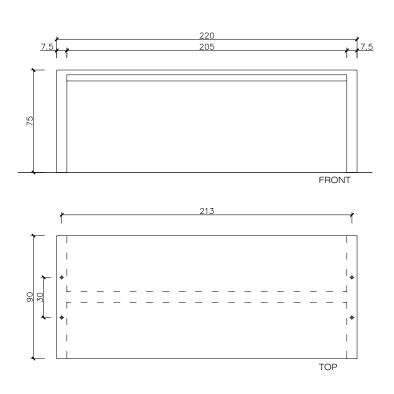





Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A Head office and production

Montserrat, 162 E 08760 Martorell Barcelona - España T. 0034 937 737 150 F. 0034 937 737 151

info@escofet.com
www.escofet.com





GA-2005/0072 SST-0090/2010 ER-0403/2016





