


Tram is a modular, reinforced concrete bench that is characterised by an organic, convivial profile. Its ergonomic, comfortable design brings a lightweight touch that offsets the heaviness of the concrete. It transmits the sensation of flexibility to the user when used as an isolated element or when several benches are grouped to form semicircles with two or three segments in the form of continuous long backless benches. It is supplied in two versions: *Tram Curvo*, and *Tram Recto*,

Concrete |  204 cm/max |  650 kg |  3

 Update 03.01.2018



Origin

It was originally designed for the public area of the sports complexes on Montjuïc Mountain in Barcelona, as part of the Olympic Ring planned by Alfonso Milá and Federico Correa.

Design

The Tram bench is supplied in two versions: Tram Curvo, which grows in an arc-like formation, allowing other benches to be added to form semicircles with two or three segments; and Tram Recto, which allows individual installation or flexible linear formations.

Ergonomic

The combined back and seat profile adapts perfectly to the ergonomics of its users.

Material

Dry-mix concrete with an etched finish and in the Escofet standard chart colour.

Installation

Although it is self-balancing to guarantee the stability of the bench, Tram can also be anchored to the paving or concrete foundation slab by means of two M16 x 140 mm metal threaded rods.





1. Bench

Tram	Recto	Curvo
Dimensions	185 x 67 x 43 (80) cm	204 x 67 x 43 (80) cm

Weight	650 kg	650 kg
---------------	--------	--------

1.1 General features

Material	Reinforced concrete	Fixing	Free-standing
-----------------	---------------------	---------------	---------------

Finish	Etched and waterproofed		
---------------	-------------------------	--	--


Colours




GR. Grey




NG. Black




BL. White



CA. Grey CA



RA. Red



BG. Beige


1.2 Installation system

Hoisting




(P= 650 / 650 kg)

Installation




Tightly screw the 3 stud bolts M-16x140, drill pavement (Ø 40 mm) and fill with resin or fat mortar. Center and caulk the bench foot all around.

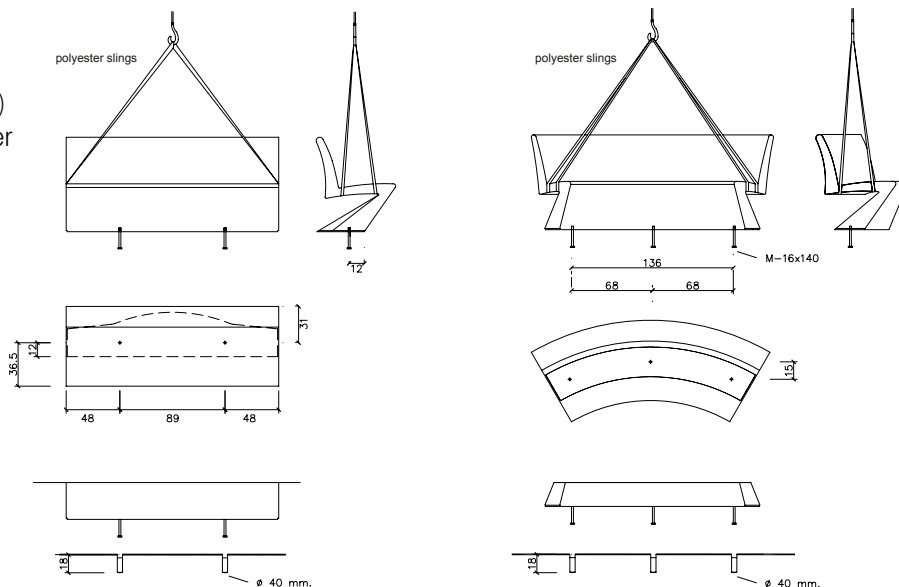

Tram Recto

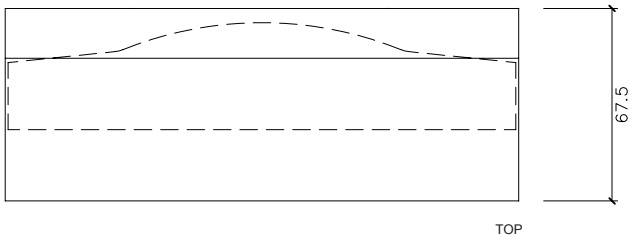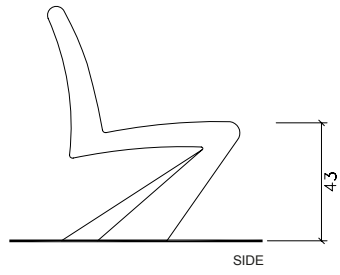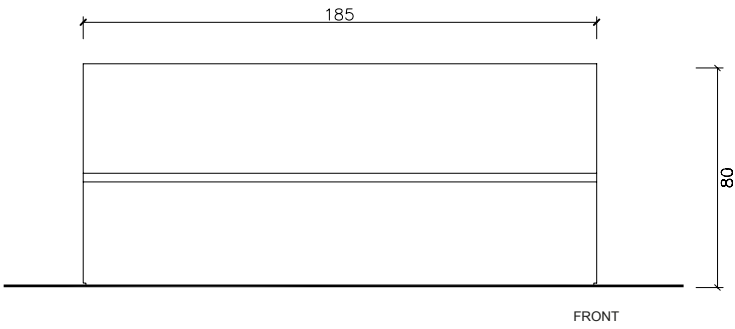

Tram Curvo

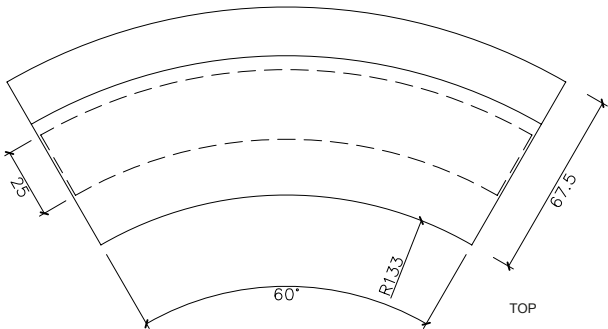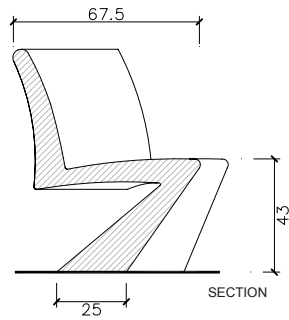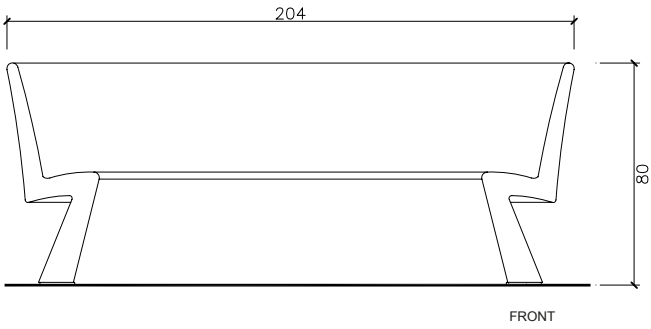



Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Follow us



GA-2005/0072 SST-0090/2010 ER-0403/2016