

Sagrera is a modular fence that delimits areas in the form of a robust, fortified stockade. The reflection of the light on the variable folds of the vertical posts produces an effect of movement and lightness. The spacing between the modules is the same as the separation between the vertical balustrades, thus ensuring the visual continuity of the unit and accentuating its barrier function with the transparency generated by a trellis structure.

Concrete |  98 cm |  670 kg

 Update 08.06.2020



SAGRERA

Josep Muxart 2007

Escofet[®]

Origin

It was designed as a proposal for fencing a school enclosure in a landscaping project for the new Sagrera railway station in Barcelona, after which it is named.

Versatile

The modules, anchored to a continuous concrete foundation, adapt well to any course, whether straight, circular or in the presence of differences in level of the existing topographic relief.

Emotional

The result is a stockade in which the play of light and shadow bring dynamism to an enclosure with greater opacity than a metal fence.


Material

Single block of concrete reinforced with stainless steel. Mould finish, with no surface treatment and in the standard Escofet chart colours.

Installation

Installed by recessing the modules in a continuous "in situ" concrete foundation strip of 60 x 60 cm leaving a space of 12 cm between modules and with the top of the baseboard flush with the level of the paving. The solid part of the baseboard admits an increase in length of up to 70 cm in the event of requiring a greater height. In this case, one part of the baseboard rises above the paving.



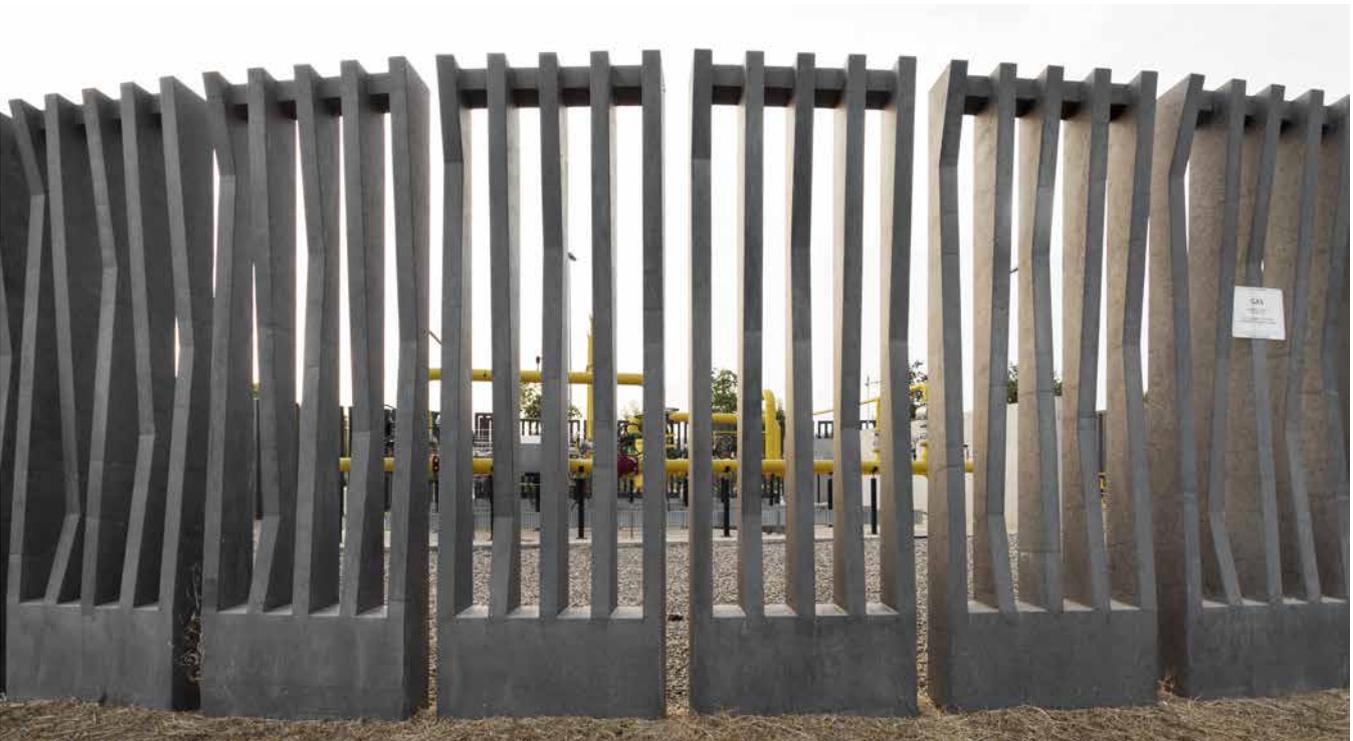

1. Fence

Sagrera fence

Dimensions

98 x 20 x 245 (315) cm

Weight


670 kg

1.1 General features


Material	Reinforced concrete	Fixing	Embedded
-----------------	---------------------	---------------	----------

Finish	Out of mold and waterproofed
---------------	------------------------------

Colours




GR. Grey



NG. Black



BL. White



BG. Beige


1.2 Installation system

Hoisting

(P= 670 kg)

Installation






Excavate the land, place the piece and perform concreting and delivering the pavement.

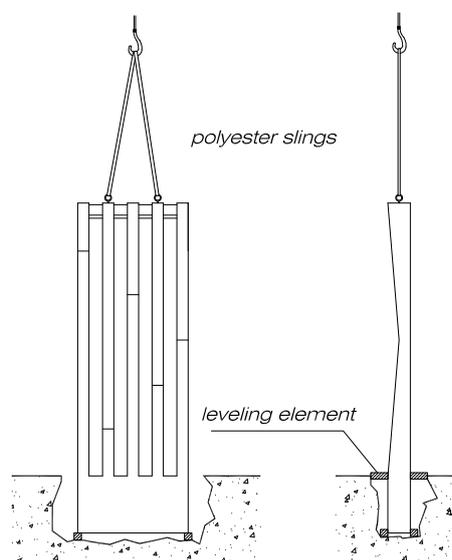


Variable distance with the consistency of the ground

1.3 Geometry

Sagrera fence

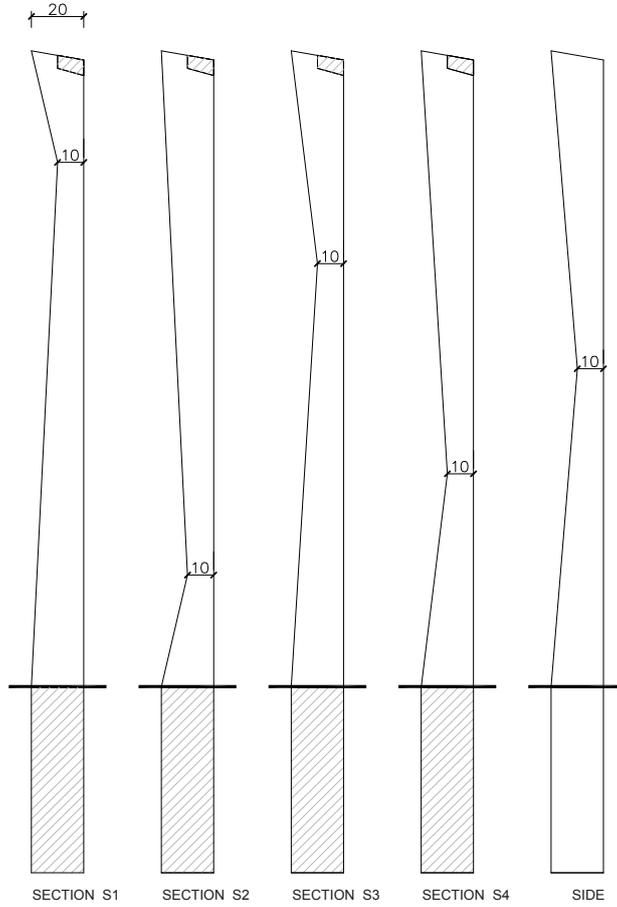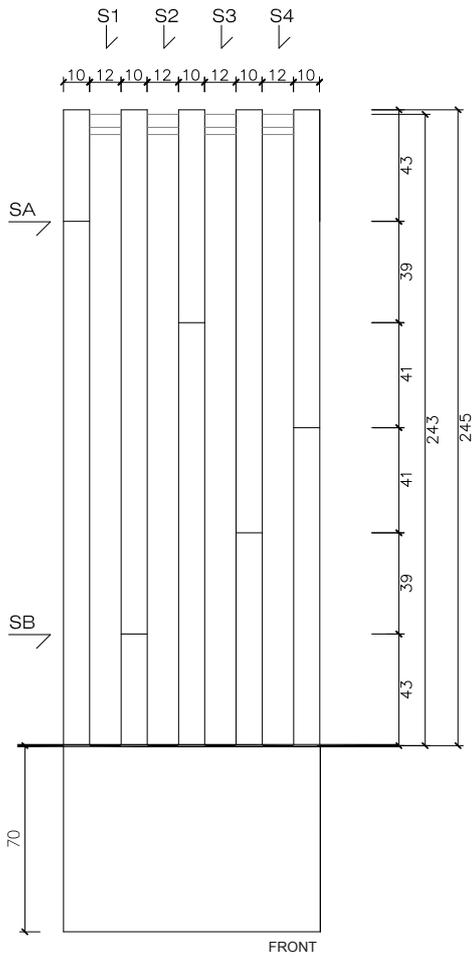

Aggregations

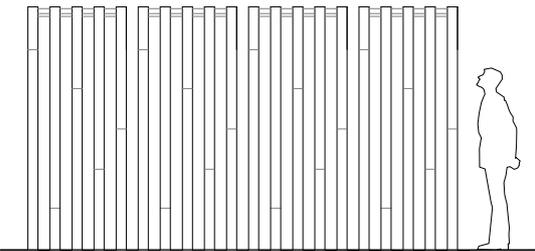



Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Follow us



GA-2005/0072 SST-0090/2010 ER-0403/2016