


The *Hebi* modular bench consists of four monobloc dry mix concrete models edited in two versions (solid and floating), and in two formats (curved and straight), which, when combined, allow for the formation of large groups of continuous straight or twisted benches that pass amidst the trees and their shade, in large-scale projects.

Concrete |  289 cm/max |  1750 kg |  5/ud.

 Update 01.02.2018



Origin

Hebi gets its name from the Japanese word for snake and this is without doubt the spirit behind the development of this item, which was first used to furnish the central esplanade of the Forum Park in Barcelona 2004.

Design

Hebi is a bench with a very pliable extruded profile that transmits an organic sensation of movement, as if it were able to grow and advance like a snake at will, on a zigzag course through parks, squares and gardens.

Modular

A combination of four models. Straight and curved for the solid version, and floating to permit the passage of light and air, forming modular aggregations with long extensions in large-scale projects.

Material

Dry mix concrete with an etched finish. Supplied in all the Escofet standard chart colours. The solid *Hebi* is straight and curved and with no reinforcement. The floating *Hebi* is straight and curved and has stainless steel reinforcement.

Installation

Hebi macizo is installed directly on the paving, with no anchors, in its straight and curved versions, while *Hebi flotante* is anchored at its ends by four threaded bolts and metal expansion plugs embedded in the paving or concrete slab.





1. Landscape Furniture

Hebi		Recto	Curvo
Dimensions		289x72x45 cm	310x120x45 cm
Weight		Macizo 1750 kg Flotante 950 kg	Macizo 1750 kg Flotante 950 kg
1.1 General features			
Material	Reinforced concrete	Fixing	Macizo Free-standing Flotante Anchored with screws
Finish	Etched and waterproofed		


Colours




GR. Grey




NG. Black



BL. White



CA. CA Grey



RA. Red





BG. Beige


1.2 Installation system

Hoisting
(W= 1750 / 950 kg)


Installation *Hebi Flotante*
Drill pavement (Ø14 x 180 mm) and fill with resin or fat mortar. Tightly screw the 2 stud bolts M16x140 mm. Center and caulk the bench foot all around.

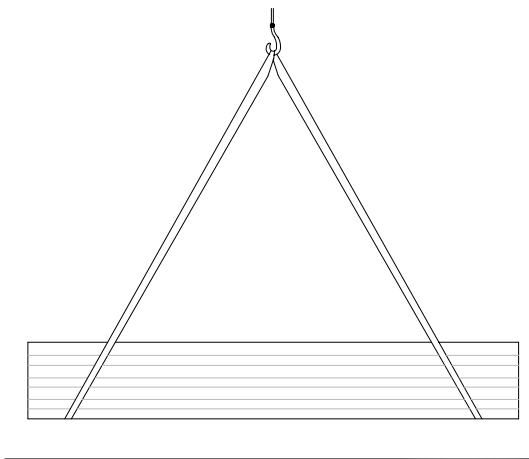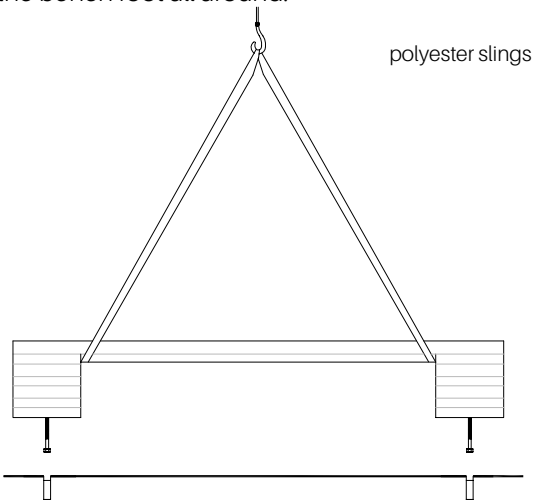


Hebi macizo

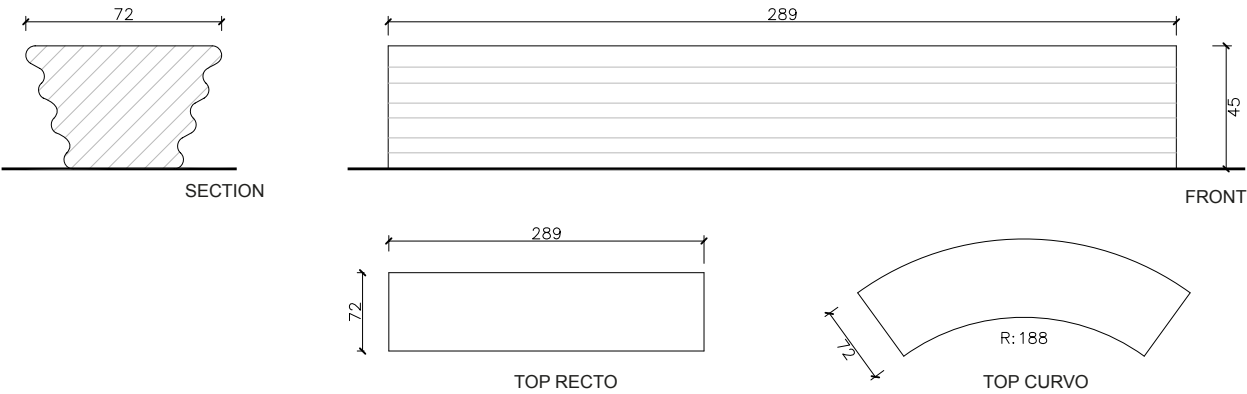

Hebi Flotante

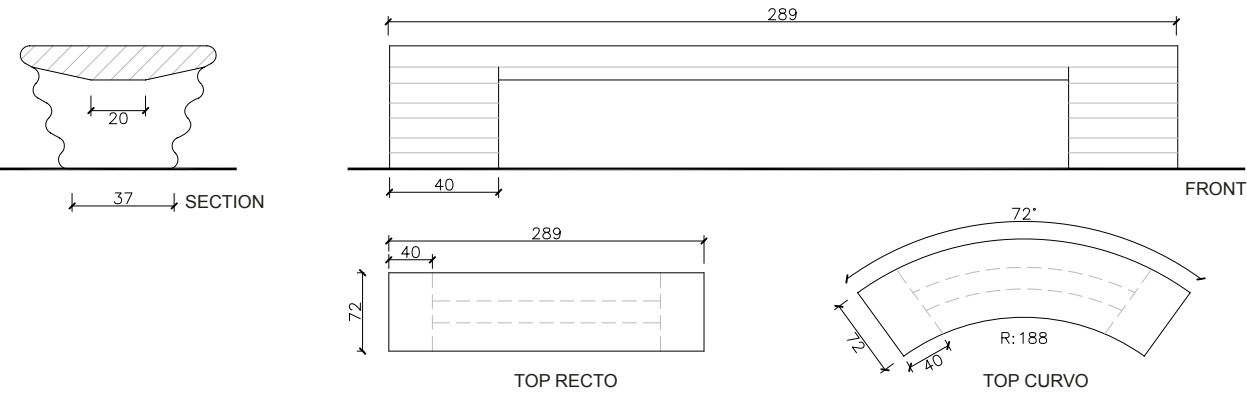

Aggregation

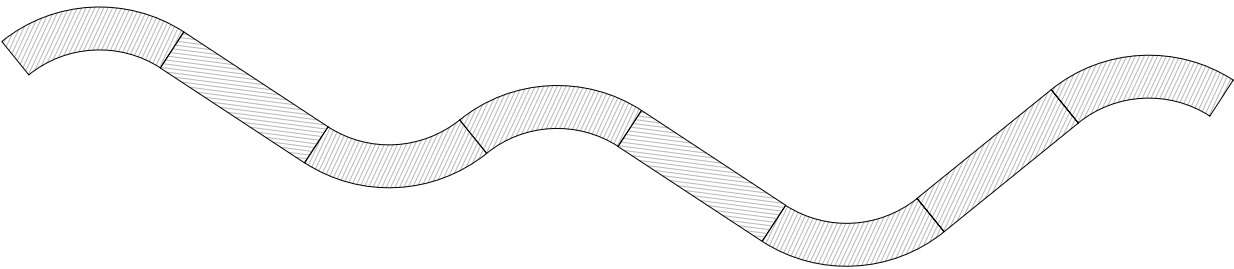



Warranty

5 years in all its components.

The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com

Follow us



GA-2005/0072 SST-0090/2010 ER-0403/2016