

Tente is a bollard for conventional use made from cast iron and stainless steel. It is suitable for installation on aligned arrangement.

Steel |  19 cm |  30 kg

 Update 09.08.2022



TENTE

Leopoldo Milá 1990

Escofet®

Origin

Its name comes from the Spanish word *tentetieso*, in reference to a doll with a counterweight at the base and which, when tilted in any direction, always retains its balance.

Material

The top and base are made from GG-20 grey cast iron with an oven-baked primer and polyester paint finish. The body is made from AISI 316L stainless steel pipe, painted or with a shiny AISI 316L polished finish. It has an internal calibrated galvanised steel threaded tensioner.

Installation

Tente is installed by means of an intermediate base plate with two M16 x 140 mm screws fixed with resin to holes with a diameter of 40 mm.

TENTE




Escofet®




1. Pass marker

Tente	
Dimensions	Ø19 x 74 cm
Weight	30 kg
1.1 General features	
Head and base	Iron cast GG-20 pearlitic
Fixing	Embedded on pavement with a special base
Finish	Forge Black or Textured Silver coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.
Tube	Acero inox AISI 316L
Finish	Polished shiny stainless / Forge Black coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.


Colours



A. Forge Black steel



B. Textured Silver steel



C. Polished shiny stainless steel


1.2 Installation system

Hoisting





(W=30 kg)

Installation

Tightly screw the 2 stud bolts M16x140 mm. Drill pavement and fill with resin or fat mortar. Center and caulk the bench foot all around. Fix with screws DIN 7991 M8x20mm.

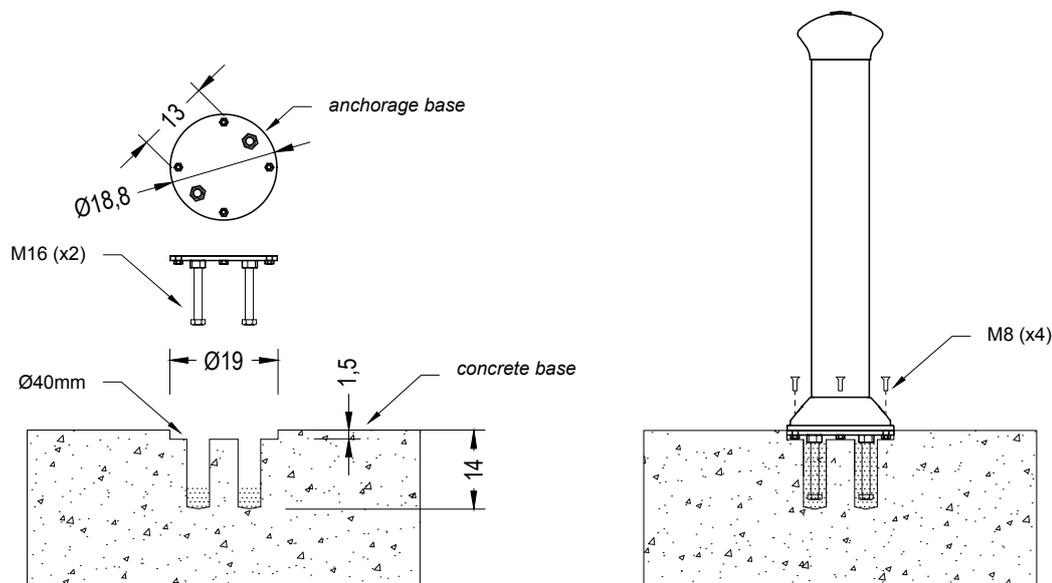

Tente

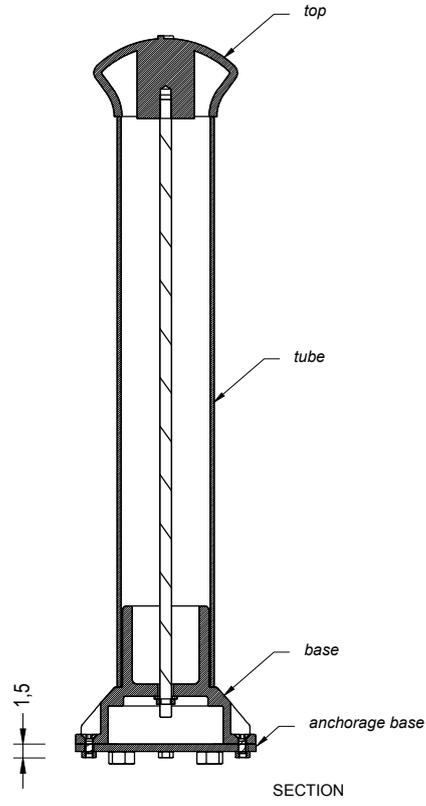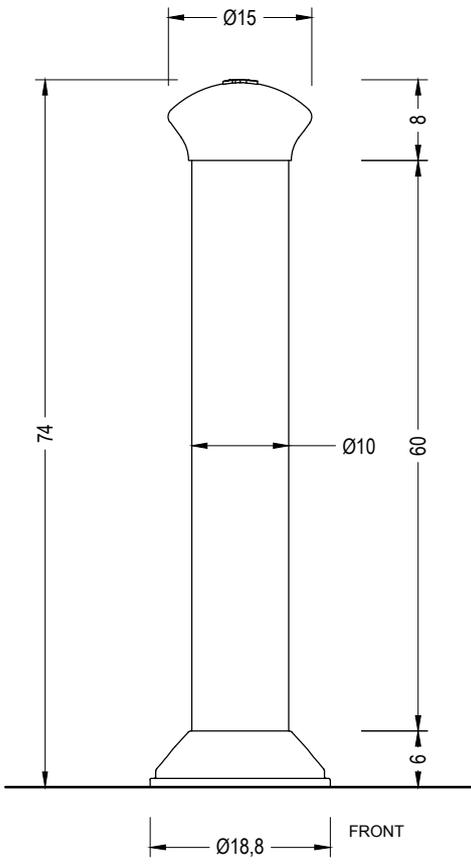



The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com



GA-2005/0072 SST-0090/2010 ER-0403/2016